


01 / Convex front of the waist bag

Edge: 300 × 150 mm | Seam allowance: 0 mm | 1 part.

Scale 1:1. Solid line - cut edge, dashed line - stitching line, blue dashes - marks.

Hand stitch · spacing 4 mm · holes Ø 0.8 mm

The diagram uses 300 × 150 mm and an upper insert 70 mm deep. Front, back, upper section with a zipper opening, lower insert, and two side wings. The belt consists of two adjustable parts. Check the volume and fit around the waist on a mock-up.

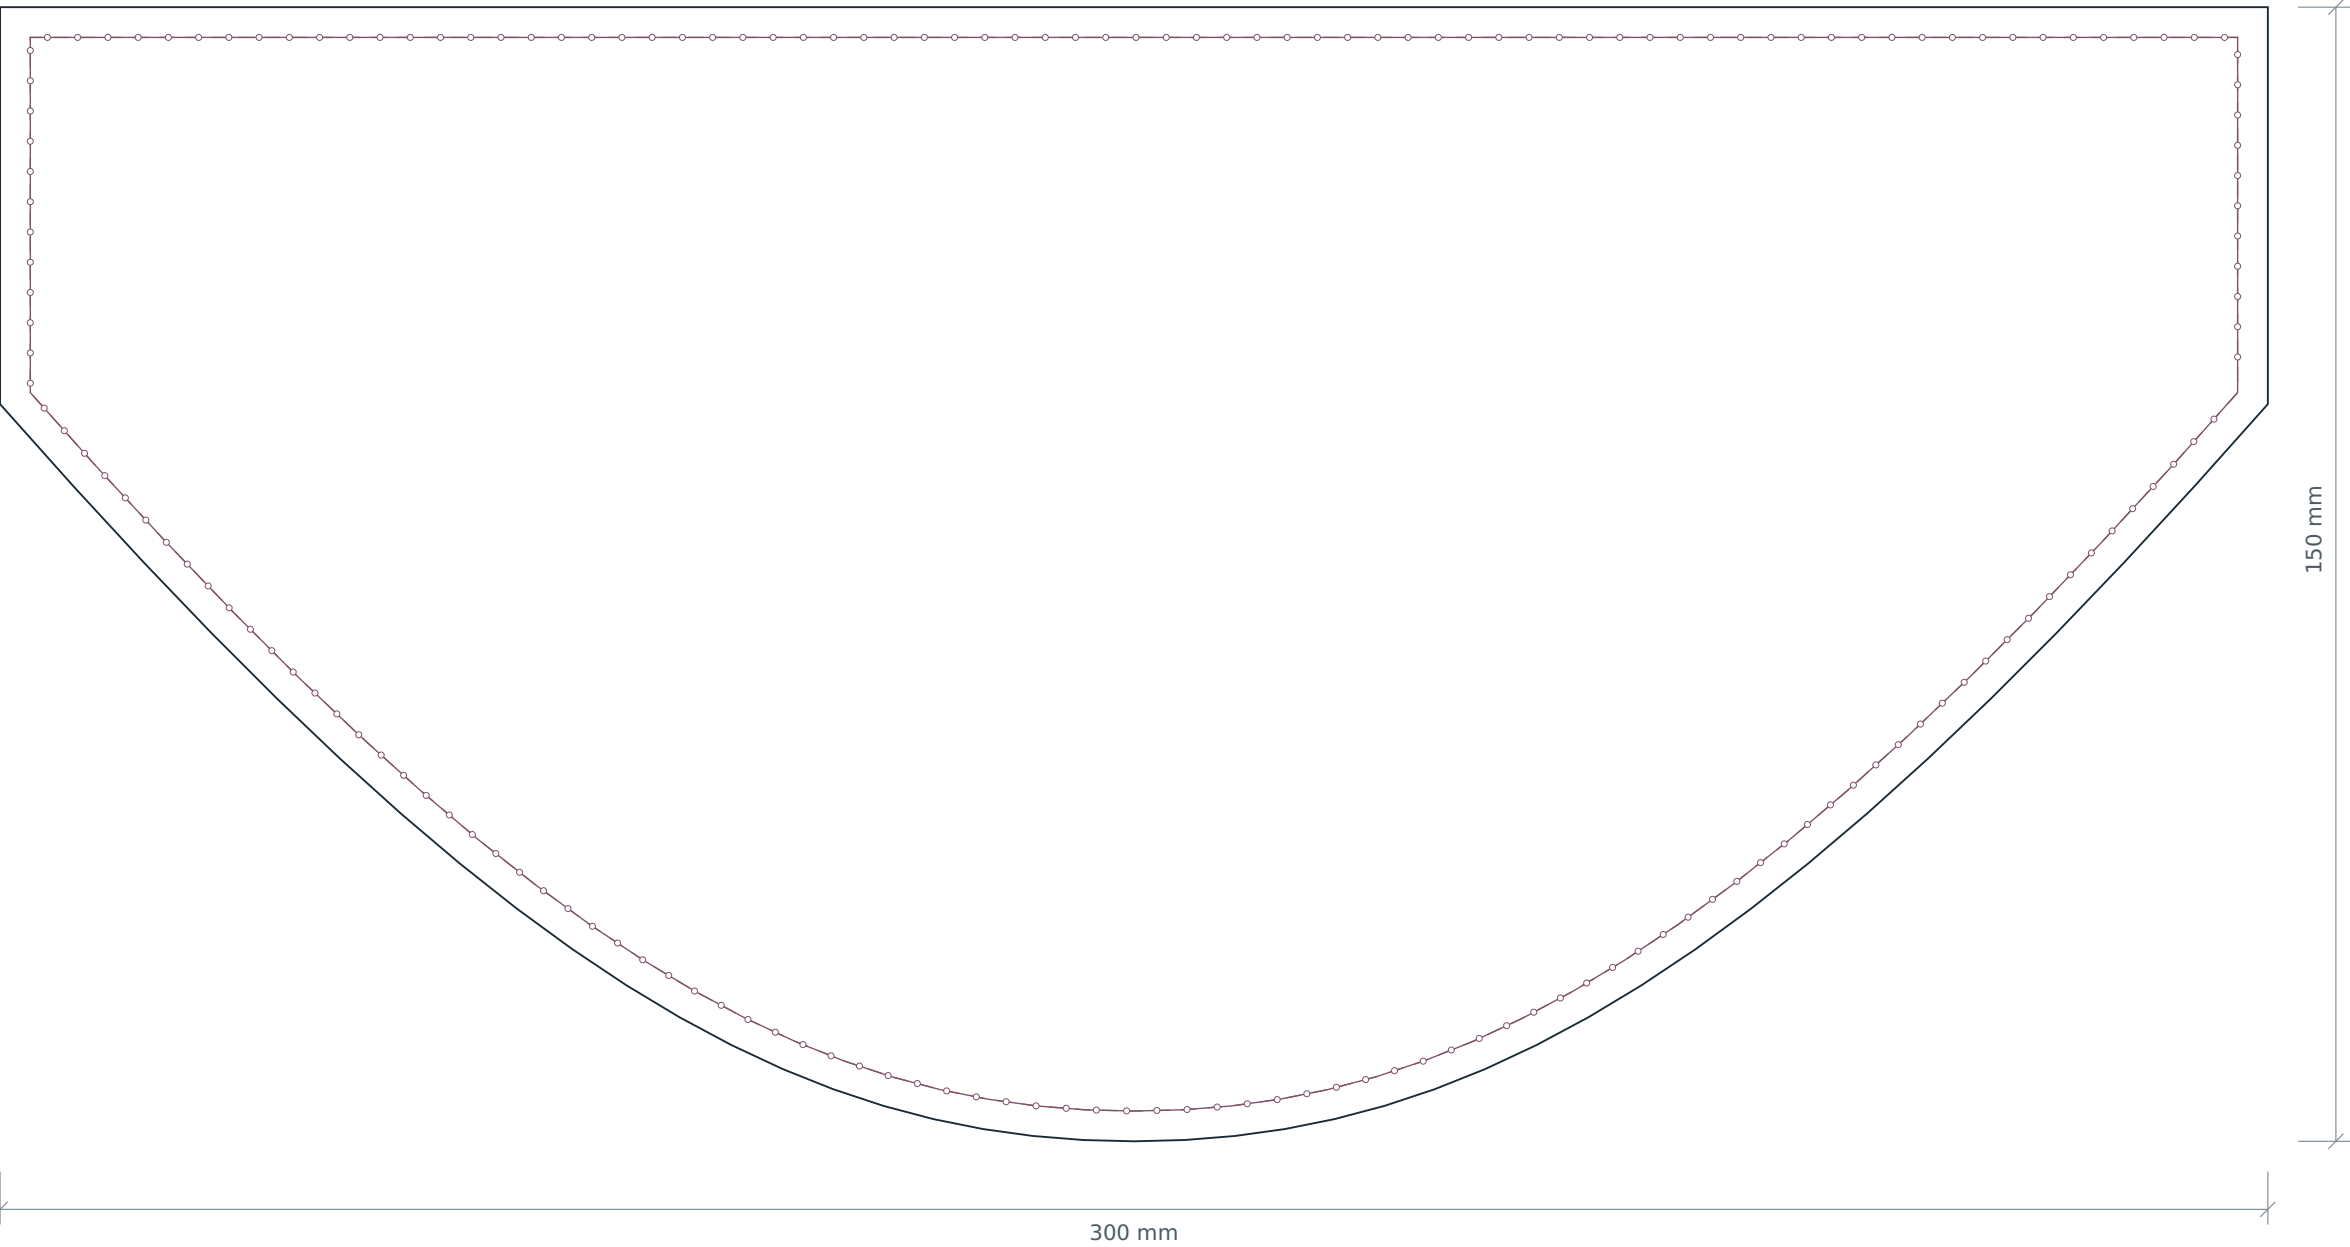

Scale check: 100 mm

Print: 100%, actual size.

Page: 354 × 246 mm.

Parameters and updates: vlotho-farben.com/cad/models/banana-belt/

Prototype: fold and thickness adjustments are not included.


02 / Back of the waist bag

Edge: 300 × 150 mm | Seam allowance: 0 mm | 1 part.

Scale 1:1. Solid line - cut edge, dashed line - stitching line, blue dashes - marks.

Hand stitch · spacing 4 mm · holes Ø 0.8 mm

The diagram uses 300 × 150 mm and an upper insert 70 mm deep. Front, back, upper section with a zipper opening, lower insert, and two side wings. The belt consists of two adjustable parts. Check the volume and fit around the waist on a mock-up.

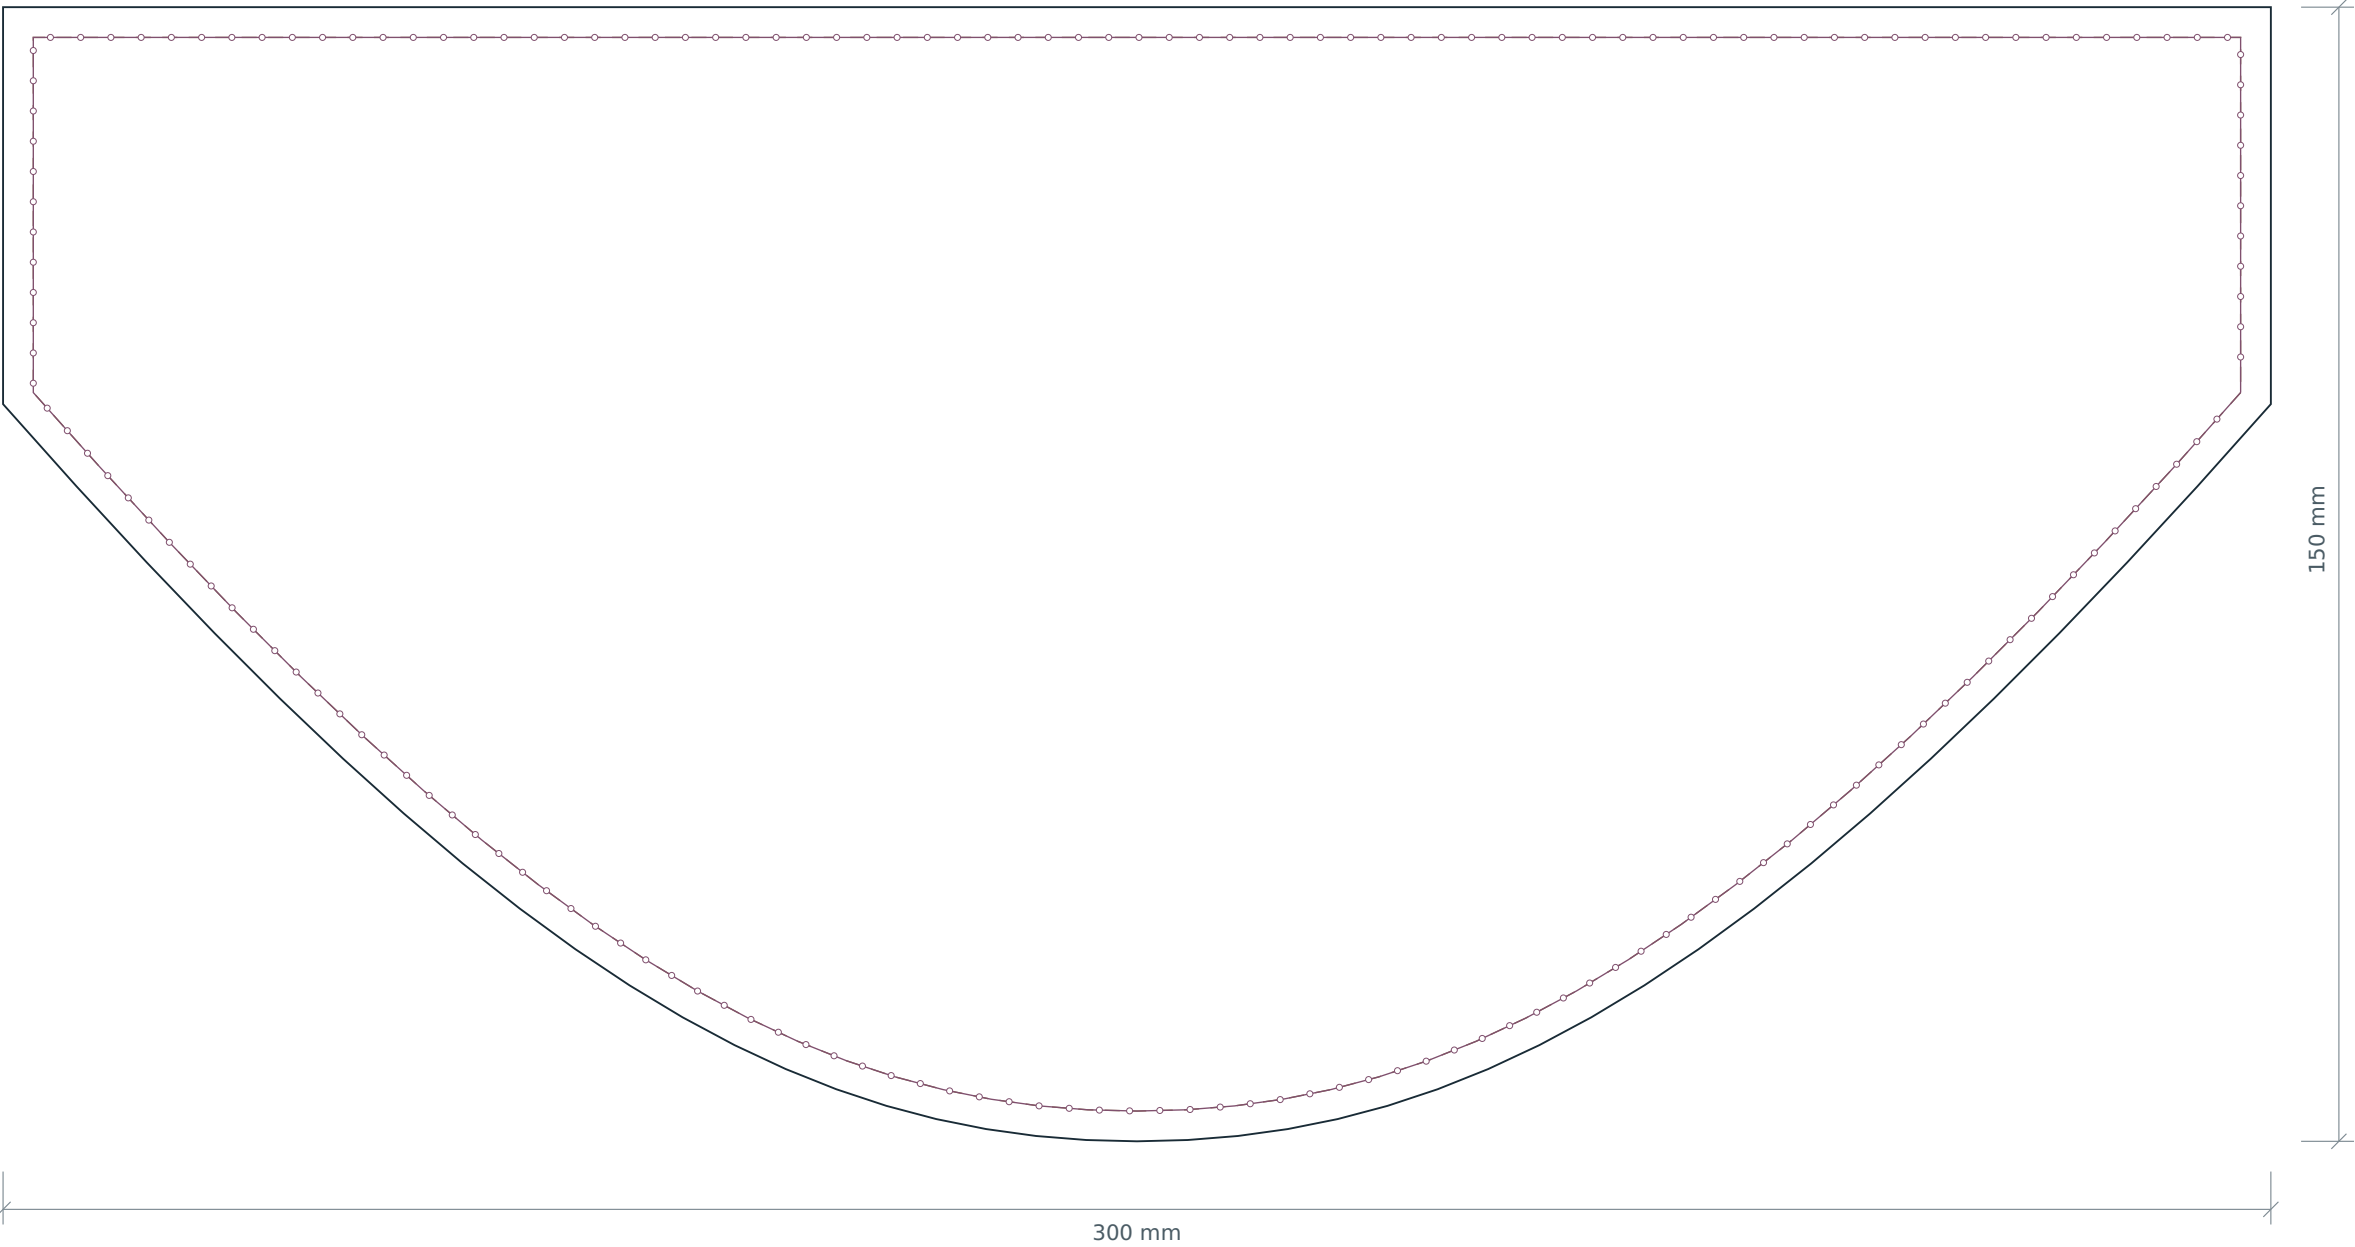

Scale check: 100 mm

Print: 100%, actual size.

Page: 354 × 246 mm.

Parameters and updates: vlotho-farben.com/cad/models/banana-belt/

Prototype: fold and thickness adjustments are not included.


03 / Lower body insert

Edge: 474.25 × 70 mm | Seam allowance: 0 mm | 1 part.

Scale 1:1. Solid line - cut edge, dashed line - stitching line, blue dashes - marks.

Hand stitch · spacing 4 mm · holes Ø 0.8 mm

The strip length equals the base arc of the matched wall. Check the zipper slot, if any, against the hardware. Check the seam fit on the prototype.

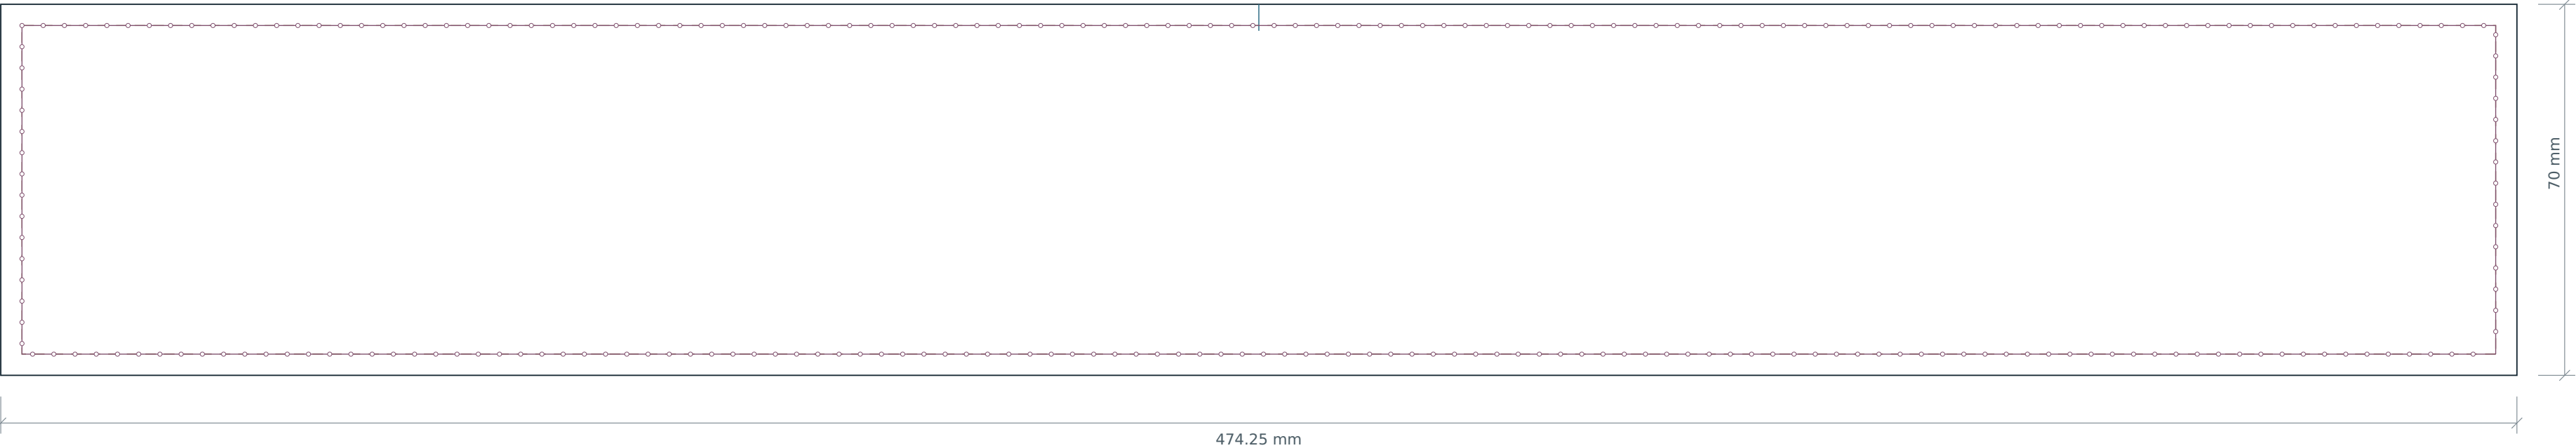

Scale check: 100 mm

Print: 100%, actual size.

Page: 528.25 × 166 mm.

Parameters and updates: vlotho-farben.com/cad/models/banana-belt/

Prototype: fold and thickness adjustments are not included.


04 / Upper insert with zipper

Edge: 300 × 70 mm | Seam allowance: 0 mm | 1 part.

Scale 1:1. Solid line - cut edge, dashed line - stitching line, blue dashes - marks.

Hand stitch · spacing 4 mm · holes Ø 0.8 mm

The diagram uses 300 × 150 mm and an upper insert 70 mm deep. Front, back, upper section with a zipper opening, lower insert, and two side wings. The belt consists of two adjustable parts. Check the volume and fit around the waist on a mock-up.

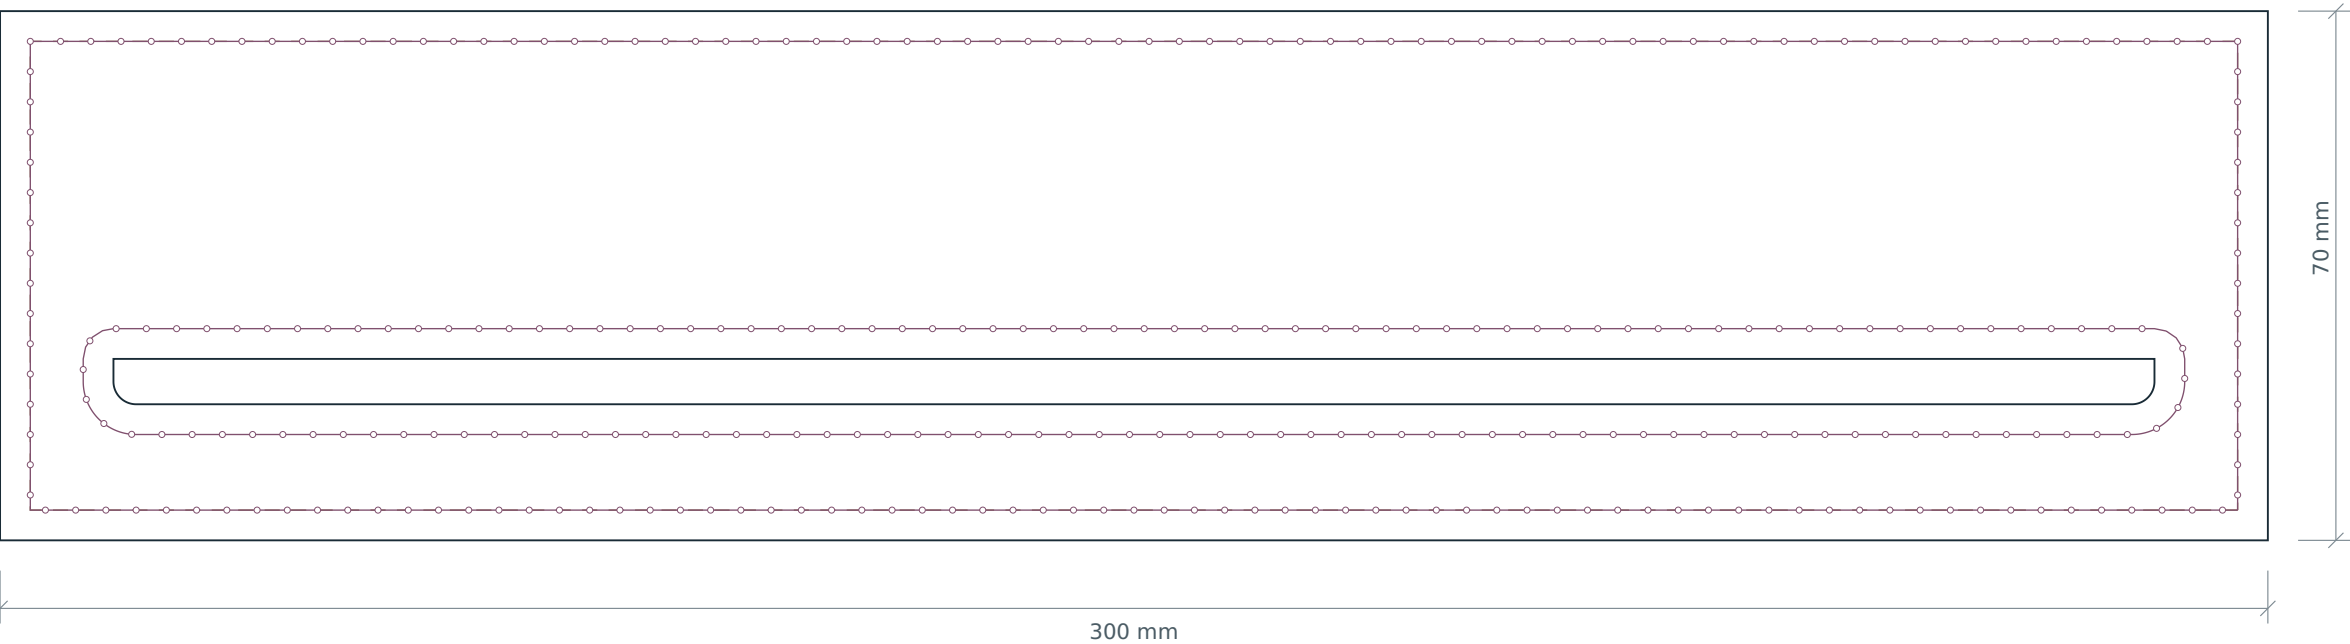

Scale check: 100 mm

Print: 100%, actual size.

Page: 354 × 166 mm.

Parameters and updates: vlotho-farben.com/cad/models/banana-belt/

Prototype: fold and thickness adjustments are not included.

05 / Side belt wing


5 / 8

Edge: 65 × 60 mm | Seam allowance: 0 mm | 1 part.

Scale 1:1. Solid line - cut edge, dashed line - stitching line, blue dashes - marks.

Hand stitch · spacing 4 mm · holes Ø 0.8 mm

The diagram uses 300 × 150 mm and an upper insert 70 mm deep. Front, back, upper section with a zipper opening, lower insert, and two side wings. The belt consists of two adjustable parts. Check the volume and fit around the waist on a mock-up.

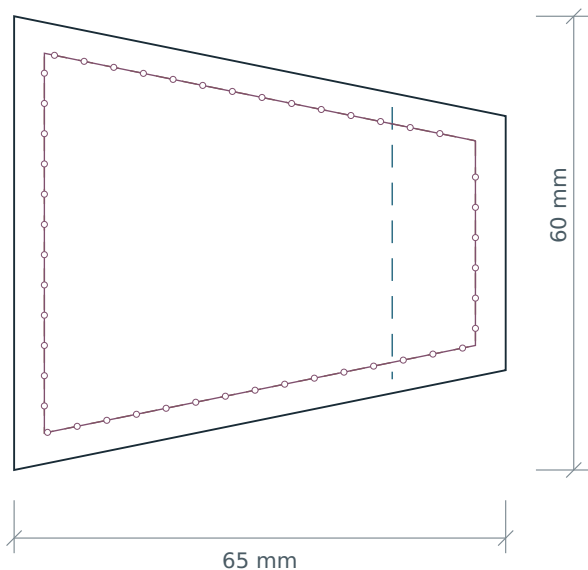

Scale check: 100 mm

Print: 100%, actual size.

Page: 240 × 160 mm.

Parameters and updates: vlotho-farben.com/cad/models/banana-belt/

Prototype: fold and thickness adjustments are not included.

VLOTHO / CAD


06 / Half of the waist strap · left

Edge: 500 × 30 mm | Seam allowance: 0 mm | 1 part.

Scale 1:1. Solid line - cut edge, dashed line - stitching line, blue dashes - marks.

Hand stitch · spacing 4 mm · holes Ø 0.8 mm

The diagram uses 300 × 150 mm and an upper insert 70 mm deep. Front, back, upper section with a zipper opening, lower insert, and two side wings. The belt consists of two adjustable parts. Check the volume and fit around the waist on a mock-up.

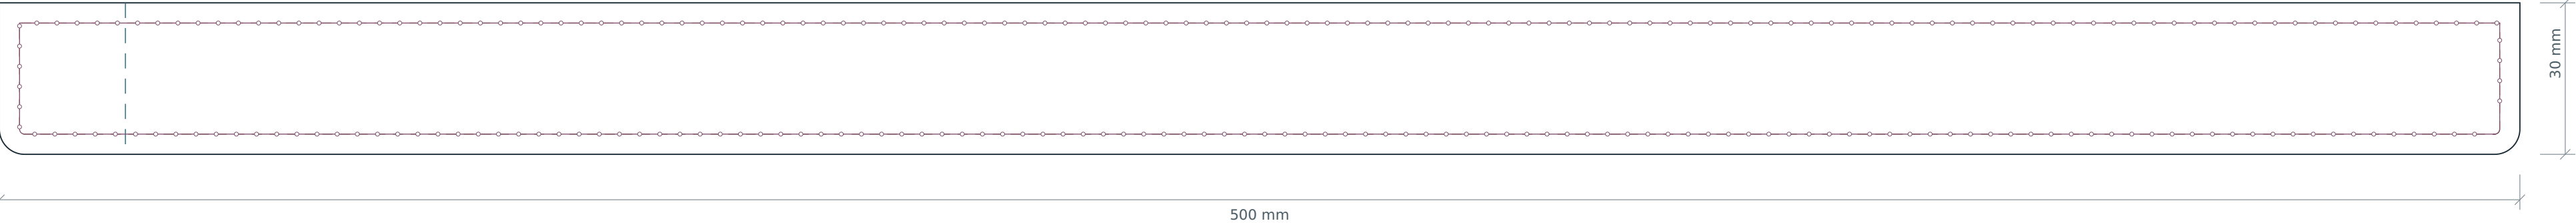

Scale check: 100 mm



Parameters and updates: vlotho-farben.com/cad/models/banana-belt/

Prototype: fold and thickness adjustments are not included.

Print: 100%, actual size.

Page: 554 × 160 mm.

07 / Side belt wing


7 / 8

Edge: 65 × 60 mm | Seam allowance: 0 mm | 1 part.

Scale 1:1. Solid line - cut edge, dashed line - stitching line, blue dashes - marks.

Hand stitch · spacing 4 mm · holes Ø 0.8 mm

The diagram uses 300 × 150 mm and an upper insert 70 mm deep. Front, back, upper section with a zipper opening, lower insert, and two side wings. The belt consists of two adjustable parts. Check the volume and fit around the waist on a mock-up.

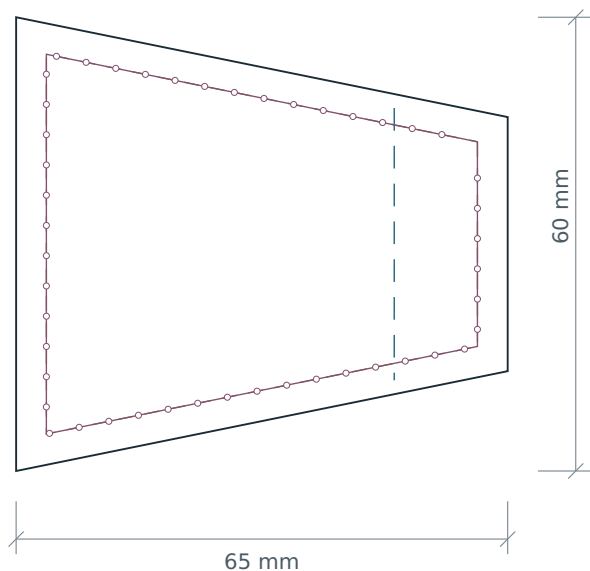

Scale check: 100 mm

Print: 100%, actual size.

Page: 240 × 160 mm.

Parameters and updates: vlotho-farben.com/cad/models/banana-belt/

Prototype: fold and thickness adjustments are not included.

VLOTHO / CAD


08 / Half of the waist strap · Right

Edge: 500 × 30 mm | Seam allowance: 0 mm | 1 part.

Scale 1:1. Solid line - cut edge, dashed line - stitching line, blue dashes - marks.

Hand stitch · spacing 4 mm · holes Ø 0.8 mm

The diagram uses 300 × 150 mm and an upper insert 70 mm deep. Front, back, upper section with a zipper opening, lower insert, and two side wings. The belt consists of two adjustable parts. Check the volume and fit around the waist on a mock-up.

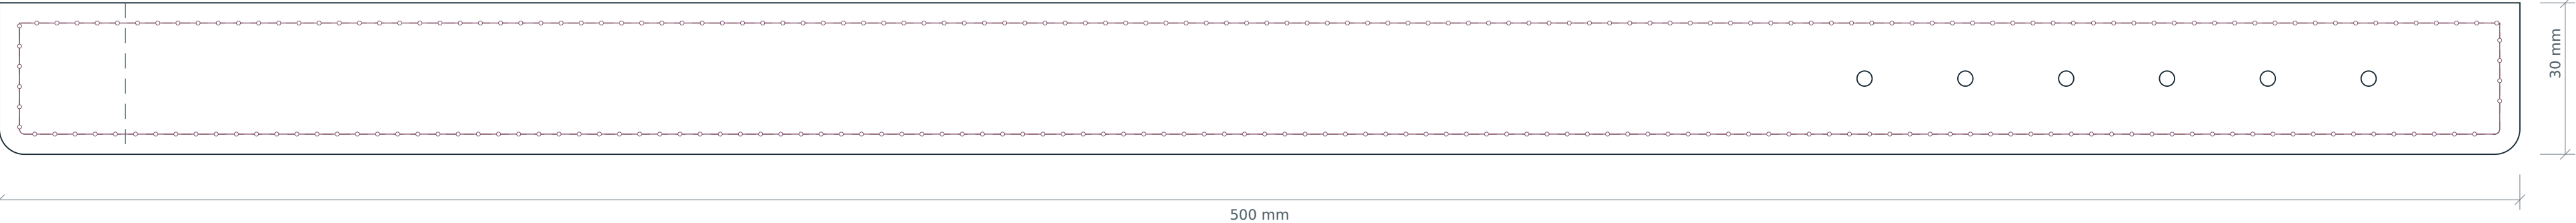

Scale check: 100 mm



Parameters and updates: vlotho-farben.com/cad/models/banana-belt/

Prototype: fold and thickness adjustments are not included.

Print: 100%, actual size.

Page: 554 × 160 mm.