


01 / Strap strip

Edge: 1150 × 35 mm | Cut-edge dimensions · seam offset 3 mm | 1 part.

Scale 1:1. Solid line - cut edge, dashed line - seam line, blue dashes - marks.

Hand stitch · spacing 4 mm · holes Ø 0.8 mm

Perimeter seam: offset 3 mm. At the sharp tip, skip overly close holes so the punches do not overlap. Buckle holes: 5 pcs., Ø 4 mm, spacing 25 mm; nearest at 90 mm from the tip. Tongue slot 20 × 5 mm at the fold. The initial marking is adjustable; check it against the buckle and girth before punching. Select the fold attachment separately.

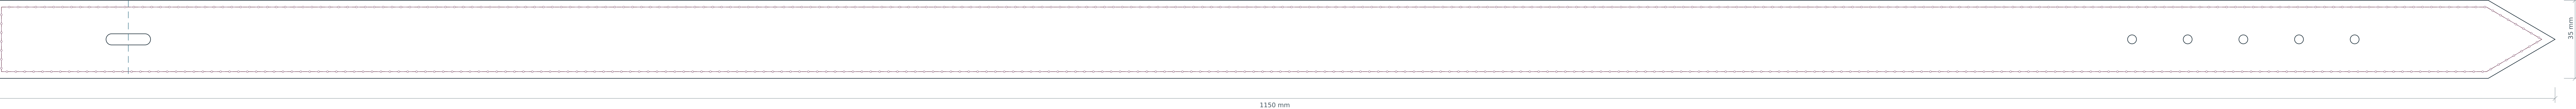

Scale check: 100 mm

Parameters and updates: vlotho-farben.com/cad/models/belt/

Prototype: fold and thickness adjustments are not included.

Print: 100%, actual size.

Page: 1204 × 160 mm.

02 / Belt loop


2 / 2

Edge: 88 × 12 mm | Cut-edge dimensions · seam offset 3 mm | 1 part.

Scale 1:1. Solid line - cut edge, dashed line - seam line, blue dashes - marks.

Hand stitch · spacing 4 mm · holes Ø 0.8 mm

Paired rows for the seam at 4 mm from the short ends align with an 8 mm overlap. Adjust the ring length around the strap, accounting for thickness.

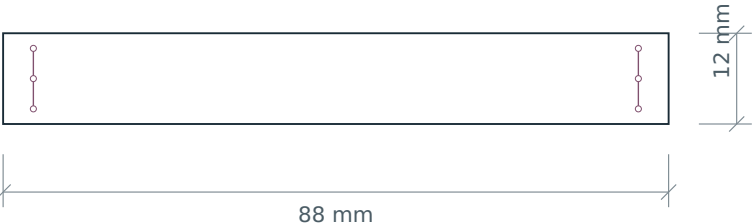

Scale check: 100 mm



Parameters and updates: vlotho-farben.com/cad/models/belt/

Prototype: fold and thickness adjustments are not included.

Print: 100%, actual size.

Page: 240 × 160 mm.