


01 / Zipper panel

Edge: 350 × 220 mm | Seam allowance: 0 mm | 1 part.

Scale 1:1. Solid line - cut edge, dashed line - stitching line, blue dashes - marks.

Hand stitch · spacing 4 mm · holes Ø 0.8 mm

Provisional dimensions 350 × 220 × 65 mm. Two triangular walls, one circular strip, and four fastening straps. Before cutting, trace the free space of the specific frame and check the clearances; the straps and zipper are to be finalized on a mock-up.

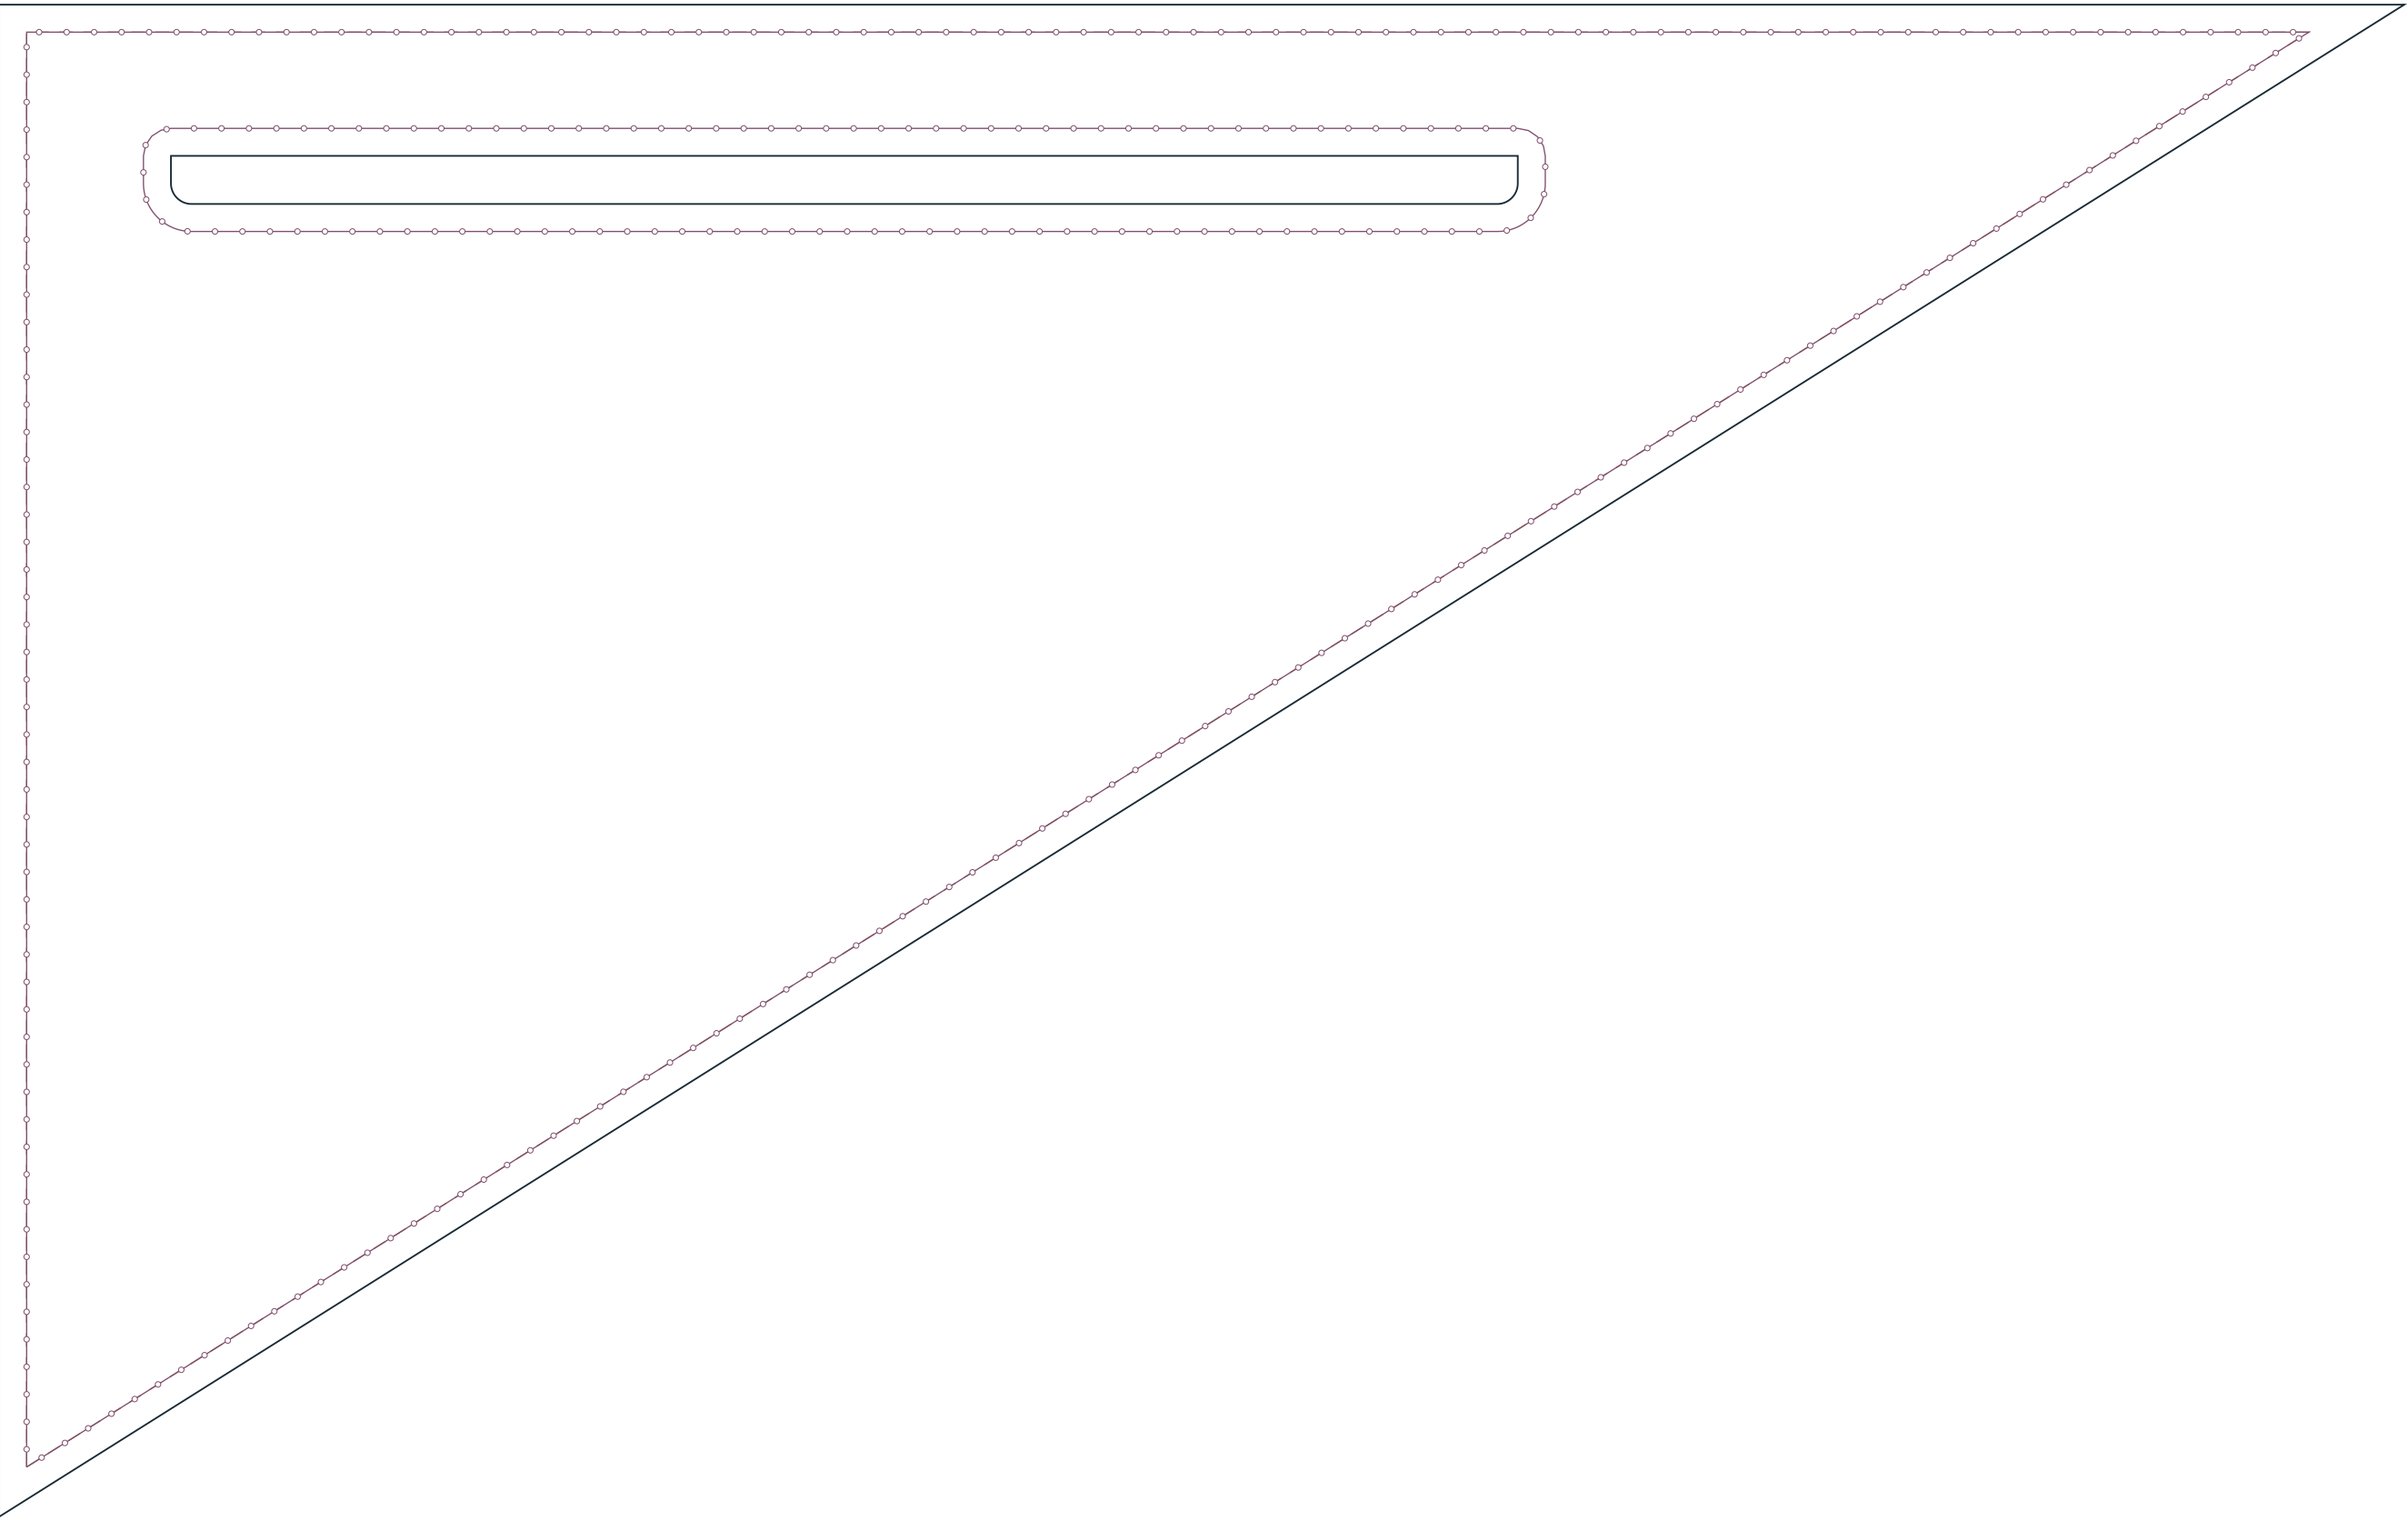

350 mm

220 mm

Scale check: 100 mm

Print: 100%, actual size.

Page: 404 × 316 mm.

Parameters and updates: vlotho-farben.com/cad/models/bike-triangle/

Prototype: fold and thickness adjustments are not included.


02 / Back panel

Edge: 350 × 220 mm | Seam allowance: 0 mm | 1 part.

Scale 1:1. Solid line - cut edge, dashed line - stitching line, blue dashes - marks.

Hand stitch · spacing 4 mm · holes Ø 0.8 mm

Provisional dimensions 350 × 220 × 65 mm. Two triangular walls, one circular strip, and four fastening straps. Before cutting, trace the free space of the specific frame and check the clearances; the straps and zipper are to be finalized on a mock-up.

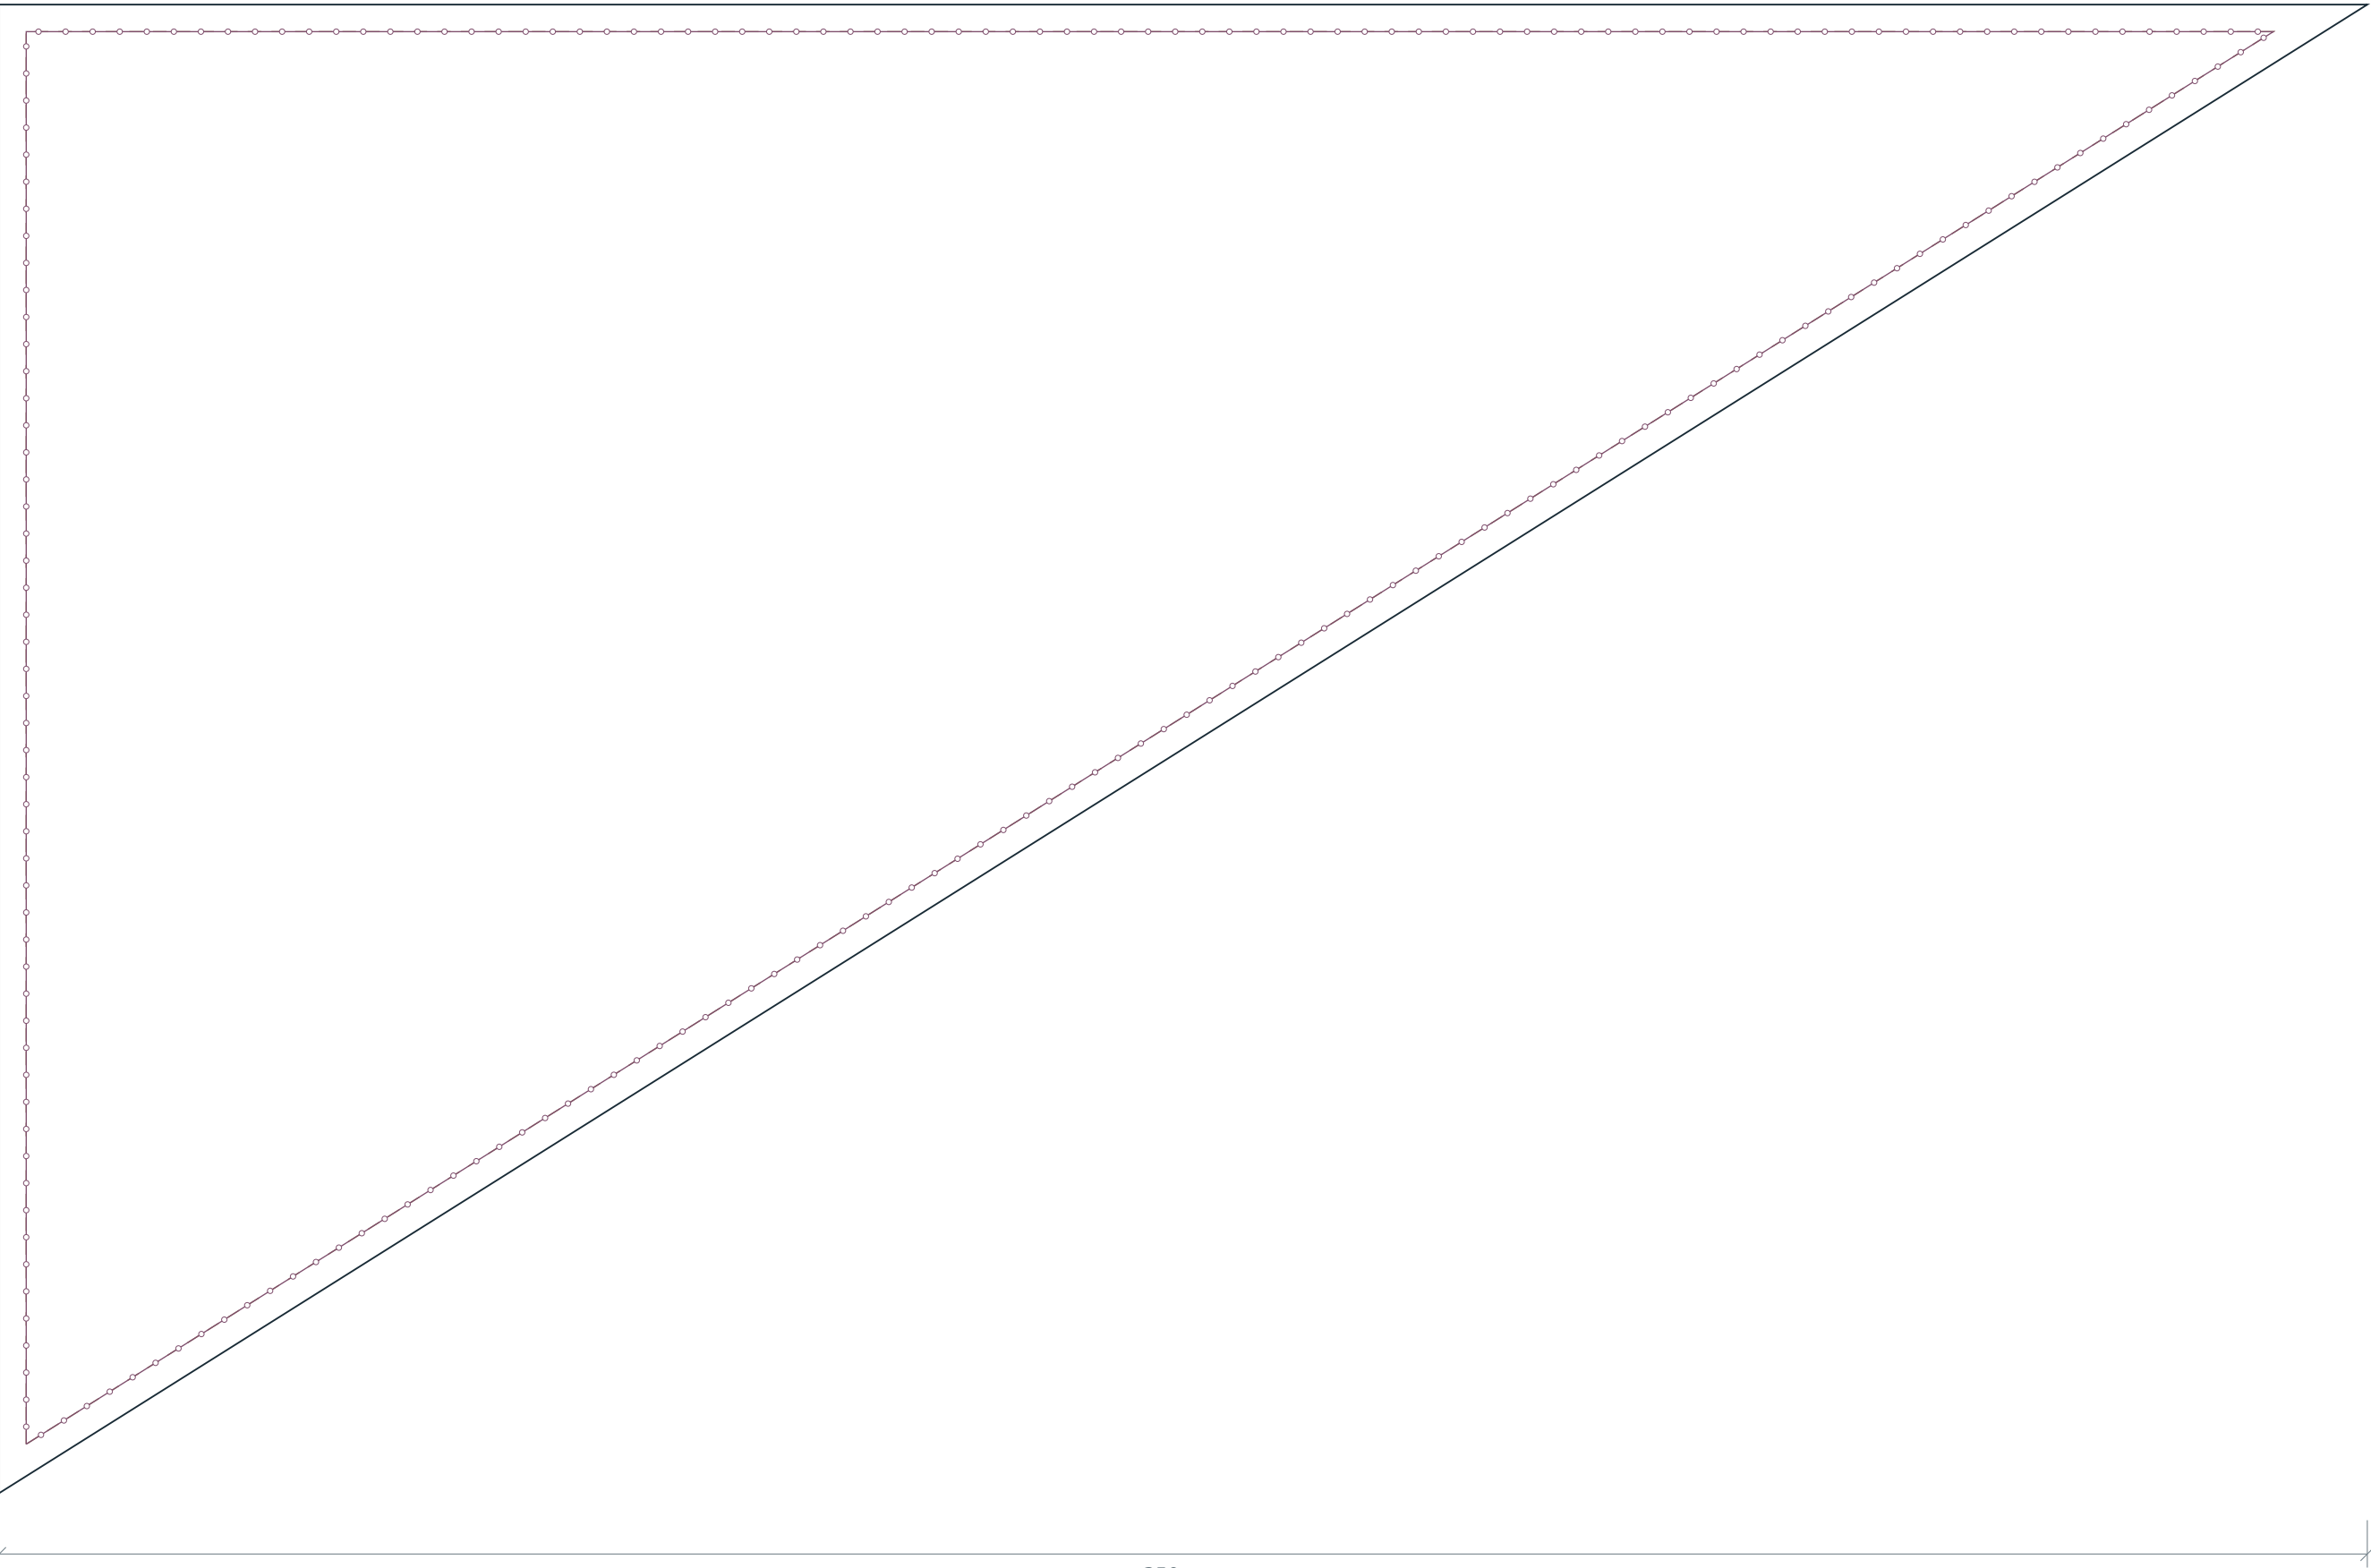

Scale check: 100 mm

Print: 100%, actual size.

Page: 404 × 316 mm.

Parameters and updates: vlotho-farben.com/cad/models/bike-triangle/

Prototype: fold and thickness adjustments are not included.

03 / Circular side panel

Edge: 983.4 × 65 mm | Seam allowance: 0 mm | 1 part.

Scale 1:1. Solid line - cut edge, dashed line - stitching line, blue dashes - marks.

Hand stitch · spacing 4 mm · holes Ø 0.8 mm

The base length equals the matched contour. Align the control marks; check the seam fit and thickness on the prototype.



Scale check: 100 mm

Parameters and updates: vlotho-farben.com/cad/models/bike-triangle/

Prototype: fold and thickness adjustments are not included.

Print: 100%, actual size.

Page: 1037.4 × 161 mm.

04 / Strap · frame-strap-0


4 / 7

Edge: 165 × 18 mm | Seam allowance: 0 mm | 1 part.

Scale 1:1. Solid line - cut edge, dashed line - stitching line, blue dashes - marks.

Hand stitch · spacing 4 mm · holes Ø 0.8 mm

Provisional dimensions 350 × 220 × 65 mm. Two triangular walls, one circular strip, and four fastening straps. Before cutting, trace the free space of the specific frame and check the clearances; the straps and zipper are to be finalized on a mock-up.

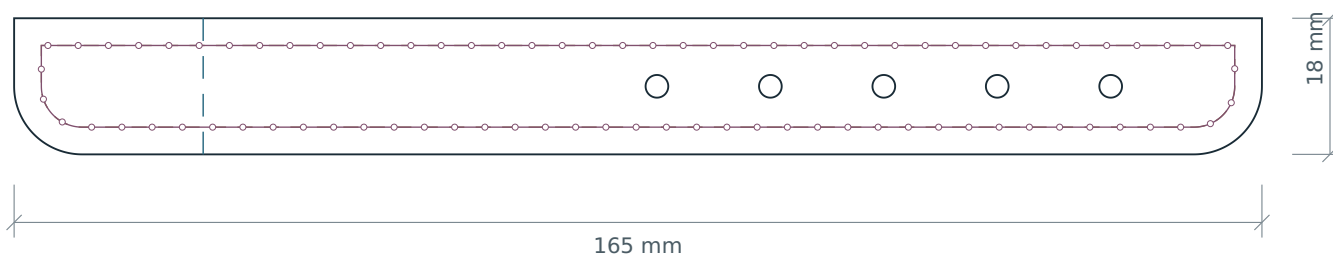

Scale check: 100 mm



Parameters and updates: vlotho-farben.com/cad/models/bike-triangle/

Prototype: fold and thickness adjustments are not included.

Print: 100%, actual size.

Page: 240 × 160 mm.

VLOTHO / CAD

05 / Strap · frame-strap-1


5 / 7

Edge: 165 × 18 mm | Seam allowance: 0 mm | 1 part.

Scale 1:1. Solid line - cut edge, dashed line - stitching line, blue dashes - marks.

Hand stitch · spacing 4 mm · holes Ø 0.8 mm

Provisional dimensions 350 × 220 × 65 mm. Two triangular walls, one circular strip, and four fastening straps. Before cutting, trace the free space of the specific frame and check the clearances; the straps and zipper are to be finalized on a mock-up.

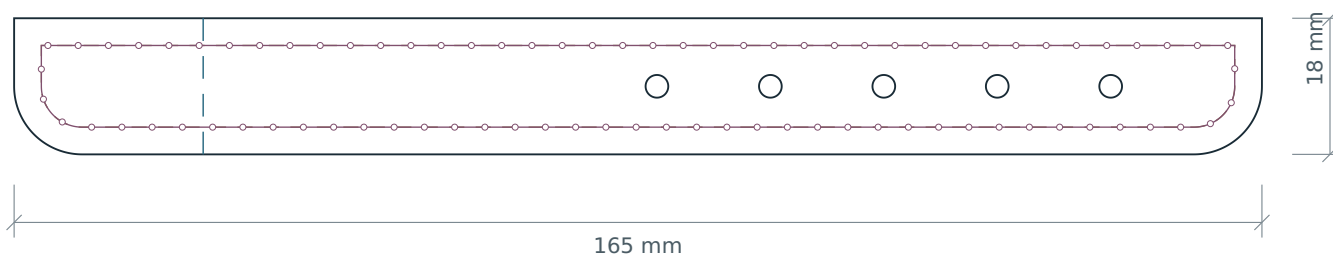

Scale check: 100 mm



Parameters and updates: vlotho-farben.com/cad/models/bike-triangle/

Prototype: fold and thickness adjustments are not included.

Print: 100%, actual size.

Page: 240 × 160 mm.

VLOTHO / CAD

06 / Strap · frame-strap-2


6 / 7

Edge: 165 × 18 mm | Seam allowance: 0 mm | 1 part.

Scale 1:1. Solid line - cut edge, dashed line - stitching line, blue dashes - marks.

Hand stitch · spacing 4 mm · holes Ø 0.8 mm

Provisional dimensions 350 × 220 × 65 mm. Two triangular walls, one circular strip, and four fastening straps. Before cutting, trace the free space of the specific frame and check the clearances; the straps and zipper are to be finalized on a mock-up.

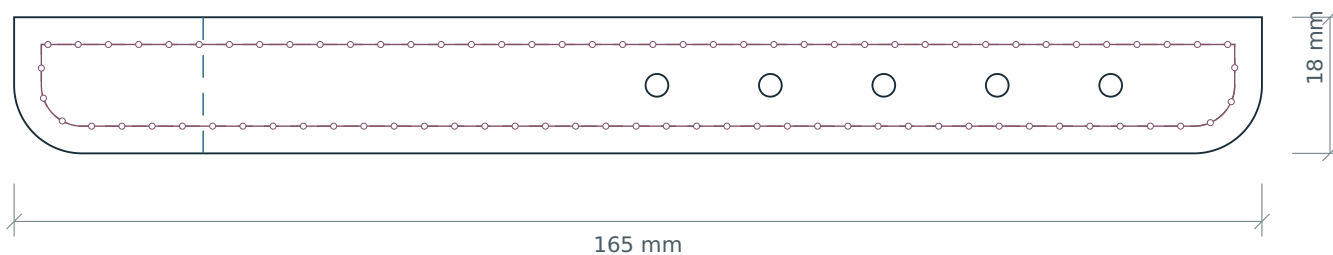

Scale check: 100 mm



Parameters and updates: vlotho-farben.com/cad/models/bike-triangle/

Prototype: fold and thickness adjustments are not included.

Print: 100%, actual size.

Page: 240 × 160 mm.

07 / Strap · frame-strap-3


7 / 7

Edge: 165 × 18 mm | Seam allowance: 0 mm | 1 part.

Scale 1:1. Solid line - cut edge, dashed line - stitching line, blue dashes - marks.

Hand stitch · spacing 4 mm · holes Ø 0.8 mm

Provisional dimensions 350 × 220 × 65 mm. Two triangular walls, one circular strip, and four fastening straps. Before cutting, trace the free space of the specific frame and check the clearances; the straps and zipper are to be finalized on a mock-up.

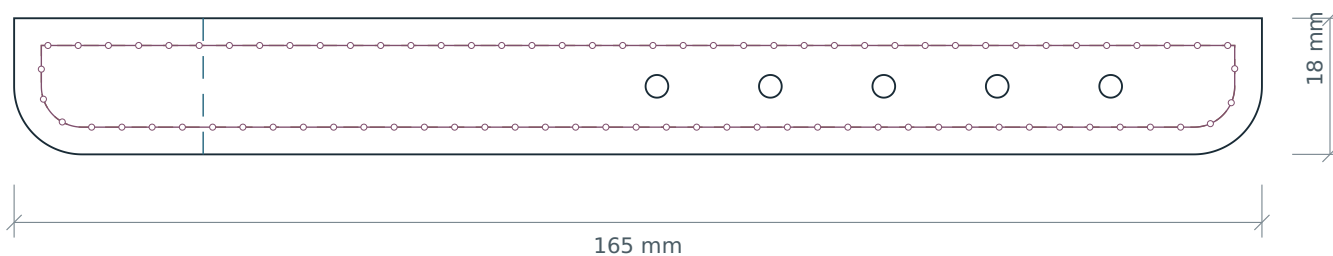

Scale check: 100 mm



Parameters and updates: vlotho-farben.com/cad/models/bike-triangle/

Prototype: fold and thickness adjustments are not included.

Print: 100%, actual size.

Page: 240 × 160 mm.