


01 / Panel · Circular layout

Edge: 538.1 × 260 mm | Seam allowance: 0 mm | 1 part.

Scale 1:1. Solid line - cut edge, dashed line - stitching line, blue dashes - marks.

Hand stitch · spacing 4 mm · holes Ø 0.8 mm

Stitch the vertical edges; the lower length equals half or the entire perimeter of the oval bottom. Cord holes: check the diameter against the eyelets. The seam allowance is specified separately.

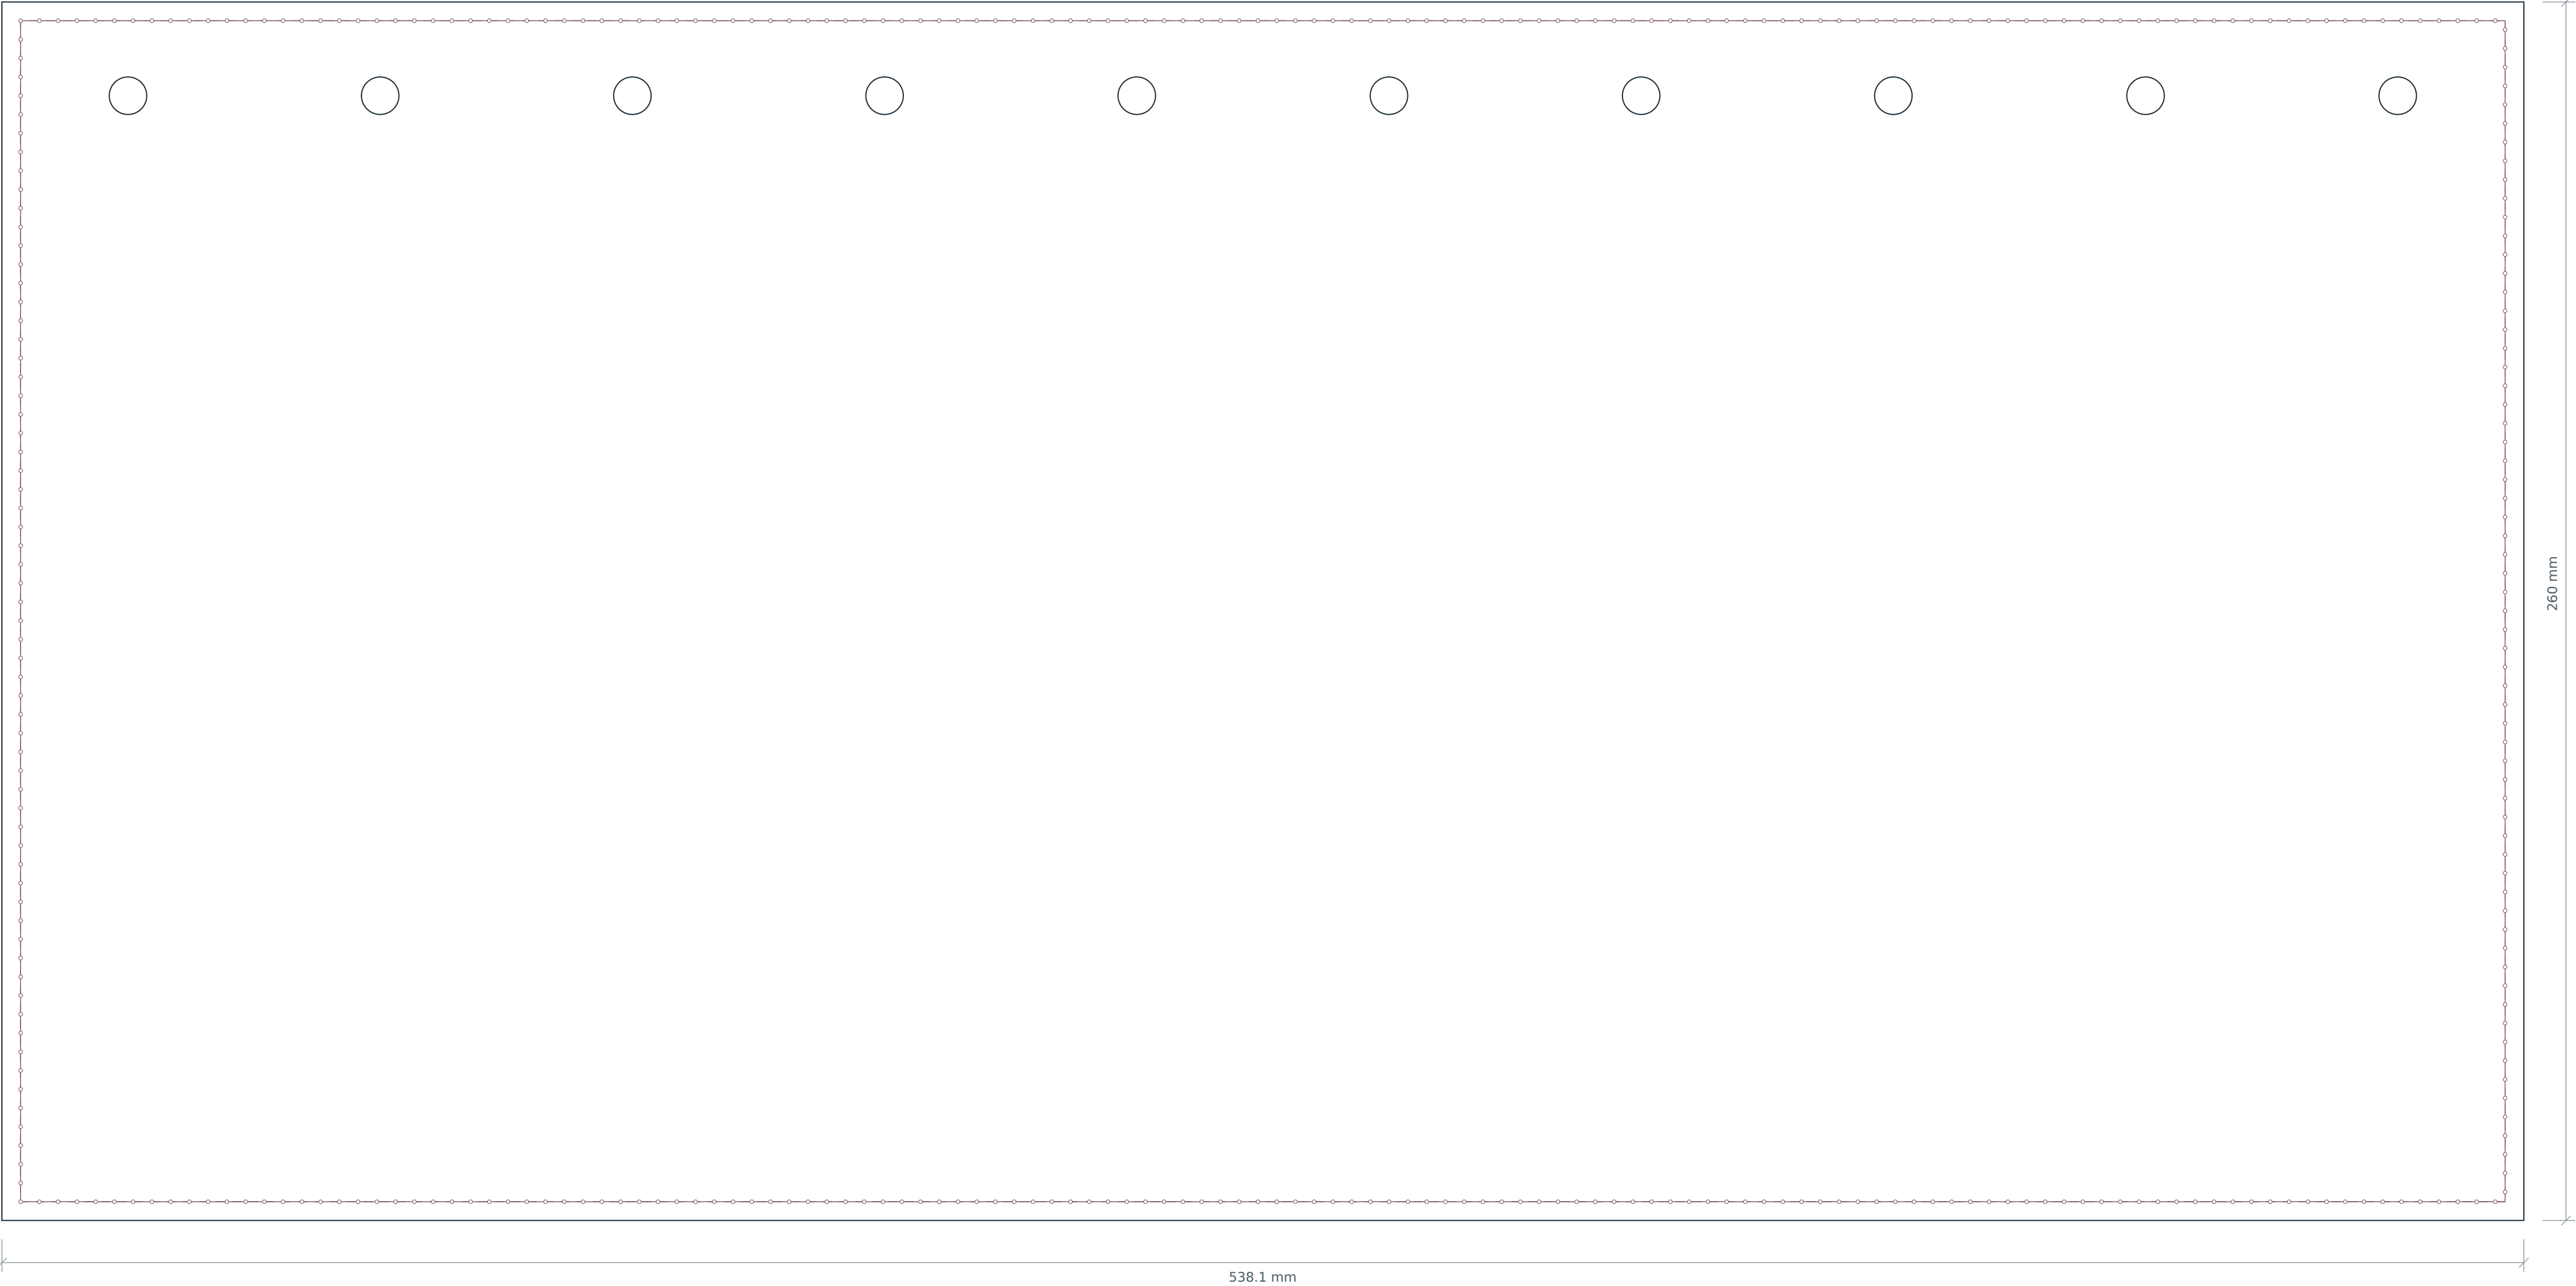

Scale check: 100 mm

Print: 100%, actual size.

Page: 592.1 × 356 mm.

02 / Oval bottom

2 / 6

Edge: 200 × 140 mm | Seam allowance: 0 mm | 1 part.

Scale 1:1. Solid line - cut edge, dashed line - stitching line, blue dashes - marks.

Hand stitch · spacing 4 mm · holes Ø 0.8 mm

The dimensions 200 × 260 × 140 mm are approximate. The one-piece wall unfolds around the perimeter of the oval base; ten holes Ø 8 mm for eyelets. The cord is purchased separately; its length is specified in the details. The gathered opening is shown schematically.



Scale check: 100 mm

Print: 100%, actual size.

Page: 254 × 236 mm.

Parameters and updates: vlotho-farben.com/cad/models/cord-bucket/

Prototype: fold and thickness adjustments are not included.

VLOTHO / CAD

03 / Drawstring keeper


3 / 6

Edge: 32 × 20 mm | Seam allowance: 0 mm | 1 part.

Scale 1:1. Solid line - cut edge, dashed line - stitching line, blue dashes - marks.

Hand stitch · spacing 4 mm · holes Ø 0.8 mm

Purchased cord: approximately the neckline perimeter plus 350 mm; adjust after assembly.



Scale check: 100 mm



Parameters and updates: vlotho-farben.com/cad/models/cord-bucket/

Prototype: fold and thickness adjustments are not included.

Print: 100%, actual size.

Page: 240 × 160 mm.

04 / Strap attachment · 1


4 / 6

Edge: 25 × 60 mm | Seam allowance: 0 mm | 1 part.

Scale 1:1. Solid line - cut edge, dashed line - stitching line, blue dashes - marks.

Hand stitch · spacing 4 mm · holes Ø 0.8 mm

The dimensions 200 × 260 × 140 mm are approximate. The one-piece wall unfolds around the perimeter of the oval base; ten holes Ø 8 mm for eyelets. The cord is purchased separately; its length is specified in the details. The gathered opening is shown schematically.

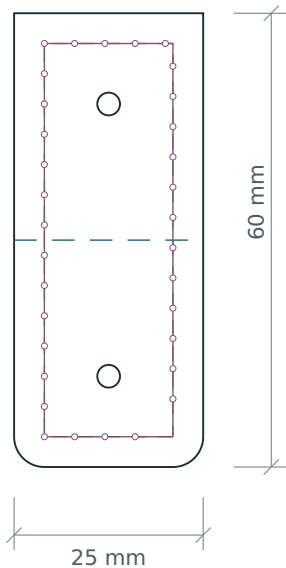

Scale check: 100 mm

Print: 100%, actual size.

Page: 240 × 160 mm.

Parameters and updates: vlotho-farben.com/cad/models/cord-bucket/

Prototype: fold and thickness adjustments are not included.

VLOTHO / CAD

05 / Strap attachment · 2


5 / 6

Edge: 25 × 60 mm | Seam allowance: 0 mm | 1 part.

Scale 1:1. Solid line - cut edge, dashed line - stitching line, blue dashes - marks.

Hand stitch · spacing 4 mm · holes Ø 0.8 mm

The dimensions 200 × 260 × 140 mm are approximate. The one-piece wall unfolds around the perimeter of the oval base; ten holes Ø 8 mm for eyelets. The cord is purchased separately; its length is specified in the details. The gathered opening is shown schematically.

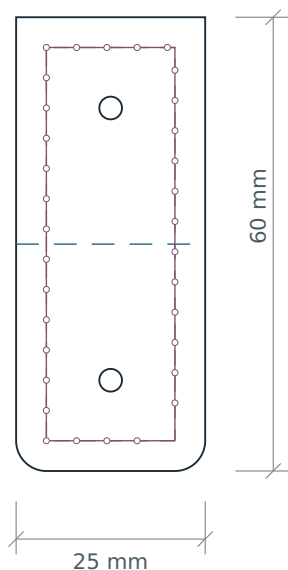

Scale check: 100 mm

Print: 100%, actual size.

Page: 240 × 160 mm.

Parameters and updates: vlotho-farben.com/cad/models/cord-bucket/

Prototype: fold and thickness adjustments are not included.

VLOTHO / CAD

06 / Adjustable strap

Edge: 1000 × 25 mm | Seam allowance: 0 mm | 1 part.

Scale 1:1. Solid line - cut edge, dashed line - stitching line, blue dashes - marks.

Hand stitch · spacing 4 mm · holes Ø 0.8 mm

The blank length includes the attachment ends. Punching Ø 3 mm; check against the buckle. The strap is shown with a nominal curve.

