


01 / Wall under frame clasp · Back

Edge: 198.5 × 200 mm | Seam allowance: 0 mm | 1 part.

Scale 1:1. Solid line - cut edge, dashed line - stitching line, blue dashes - marks.

Hand stitch · spacing 4 mm · holes Ø 0.8 mm

Insert the upper arc into the frame. The insertion line is preliminary: trace the actual clasp frame and check the groove thickness and depth.

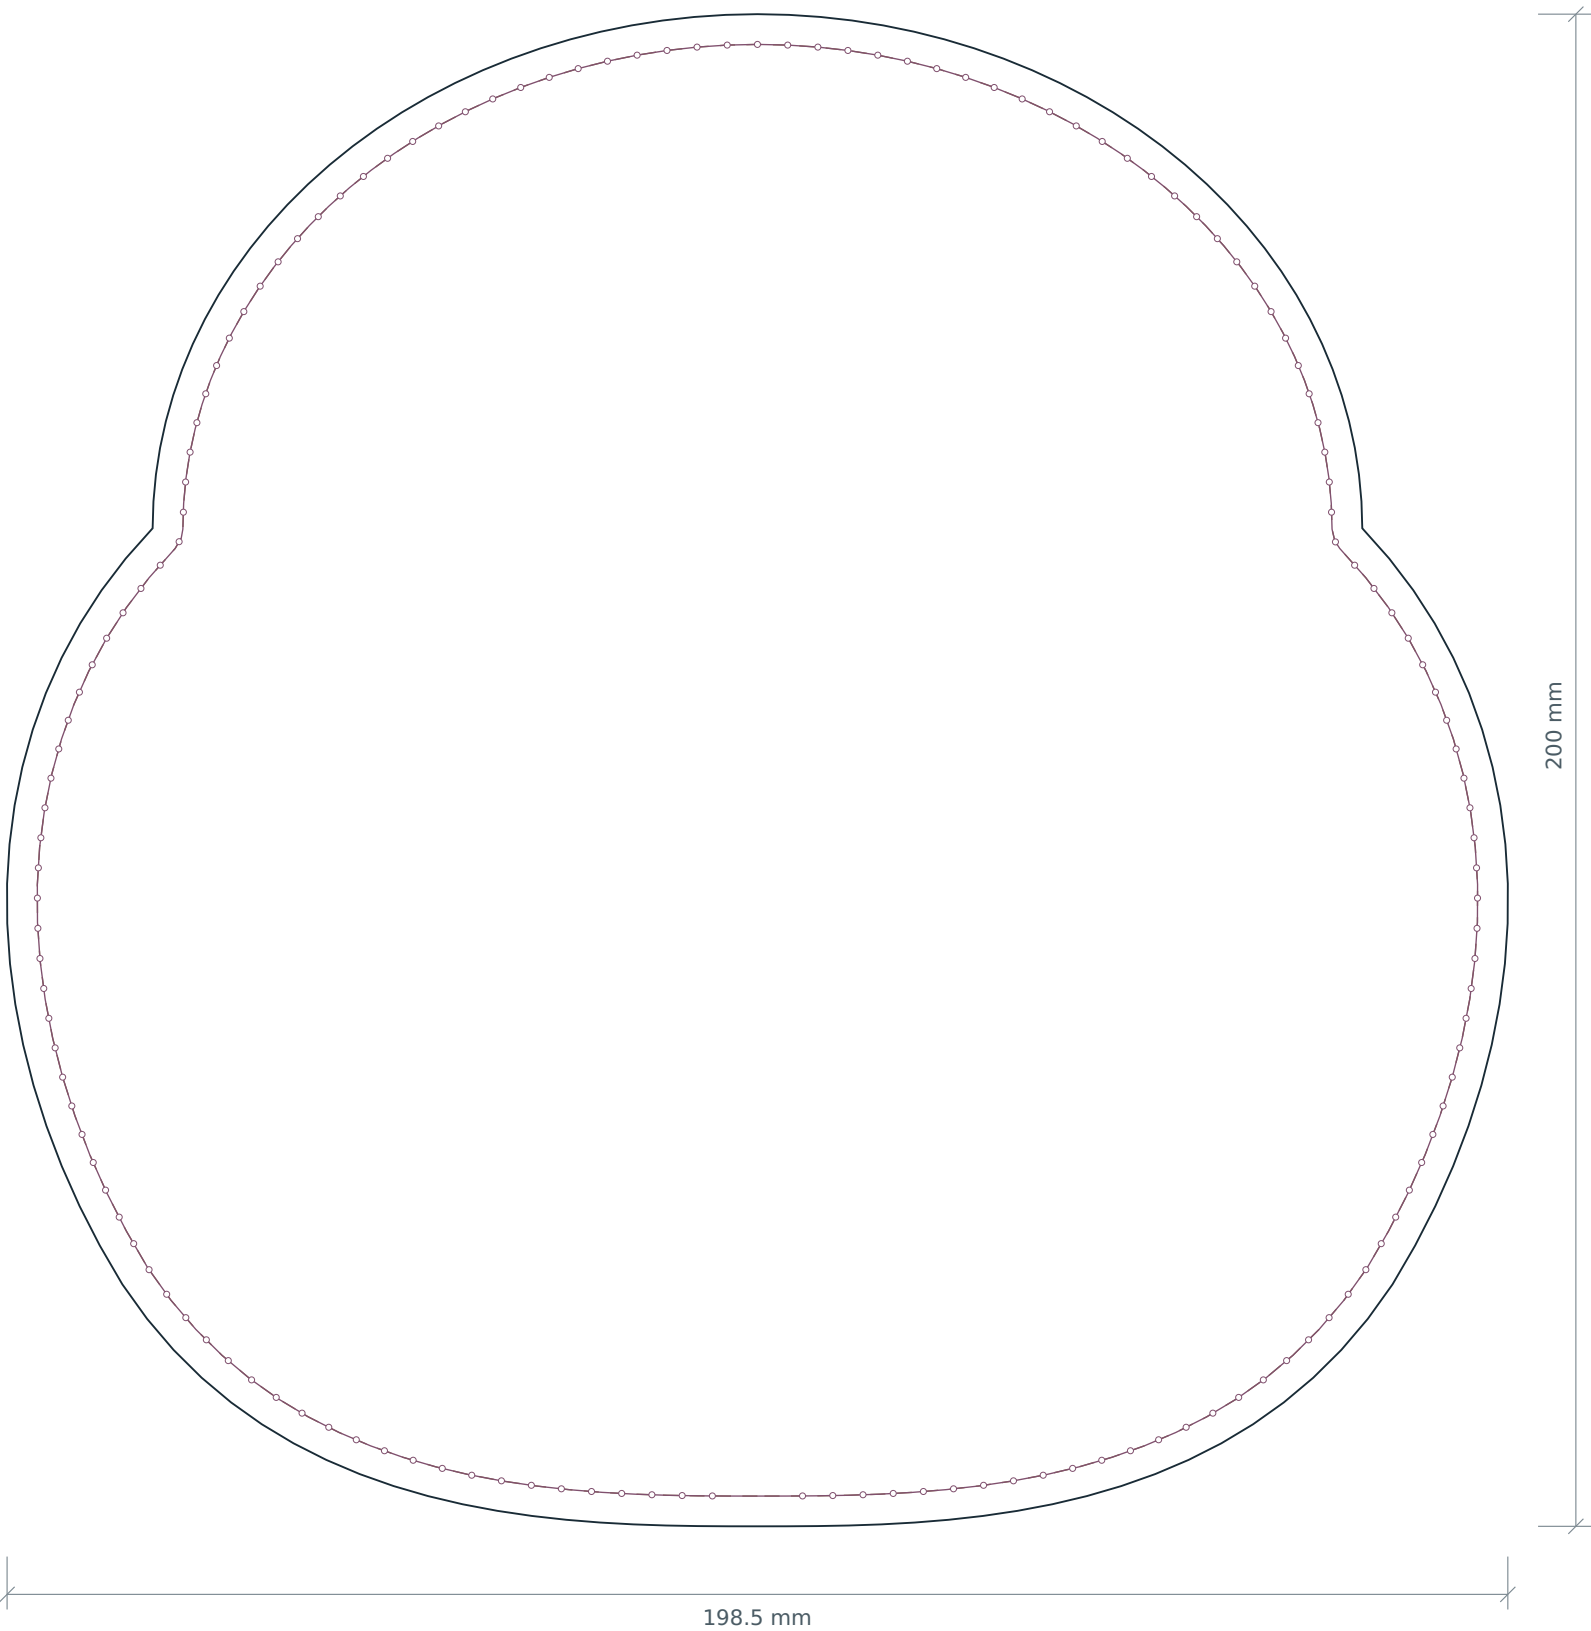

Scale check: 100 mm

Print: 100%, actual size.

Page: 252.5 × 296 mm.

Parameters and updates: vlotho-farben.com/cad/models/frame-purse/

Prototype: fold and thickness adjustments are not included.


02 / Wall under frame clasp · Front

Edge: 198.5 × 200 mm | Seam allowance: 0 mm | 1 part.

Scale 1:1. Solid line - cut edge, dashed line - stitching line, blue dashes - marks.

Hand stitch · spacing 4 mm · holes Ø 0.8 mm

Insert the upper arc into the frame. The insertion line is preliminary: trace the actual clasp frame and check the groove thickness and depth.

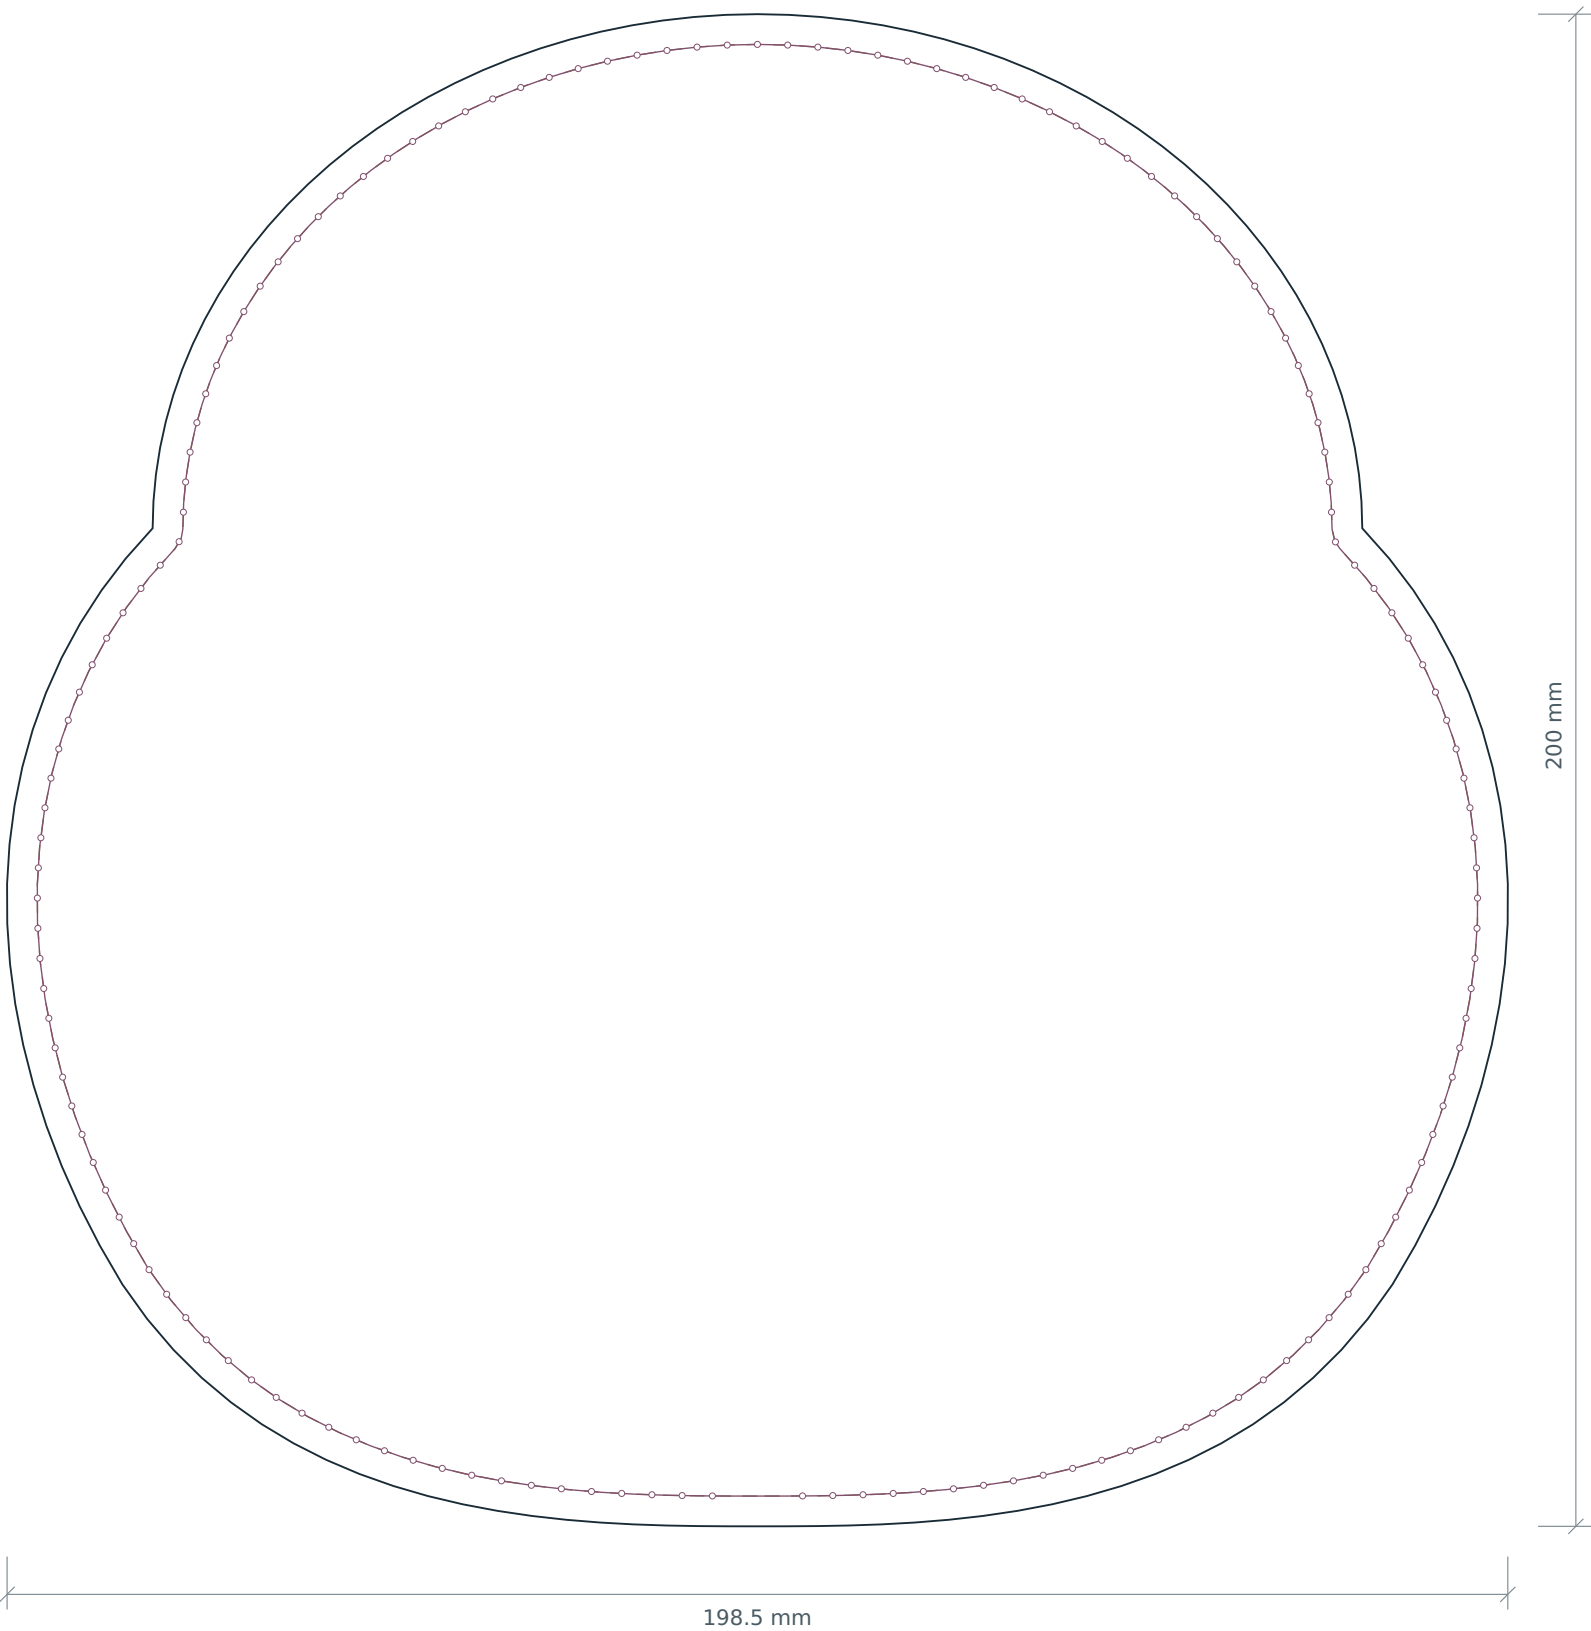

Scale check: 100 mm

Print: 100%, actual size.

Page: 252.5 × 296 mm.

Parameters and updates: vlotho-farben.com/cad/models/frame-purse/

Prototype: fold and thickness adjustments are not included.


03 / Side panel below hinges

Edge: 404.27 × 70 mm | Seam allowance: 0 mm | 1 part.

Scale 1:1. Solid line - cut edge, dashed line - stitching line, blue dashes - marks.

Hand stitch · spacing 4 mm · holes Ø 0.8 mm

The strip length equals the base arc of the matched wall. Check the zipper slot, if any, against the hardware. Check the seam fit on the prototype.

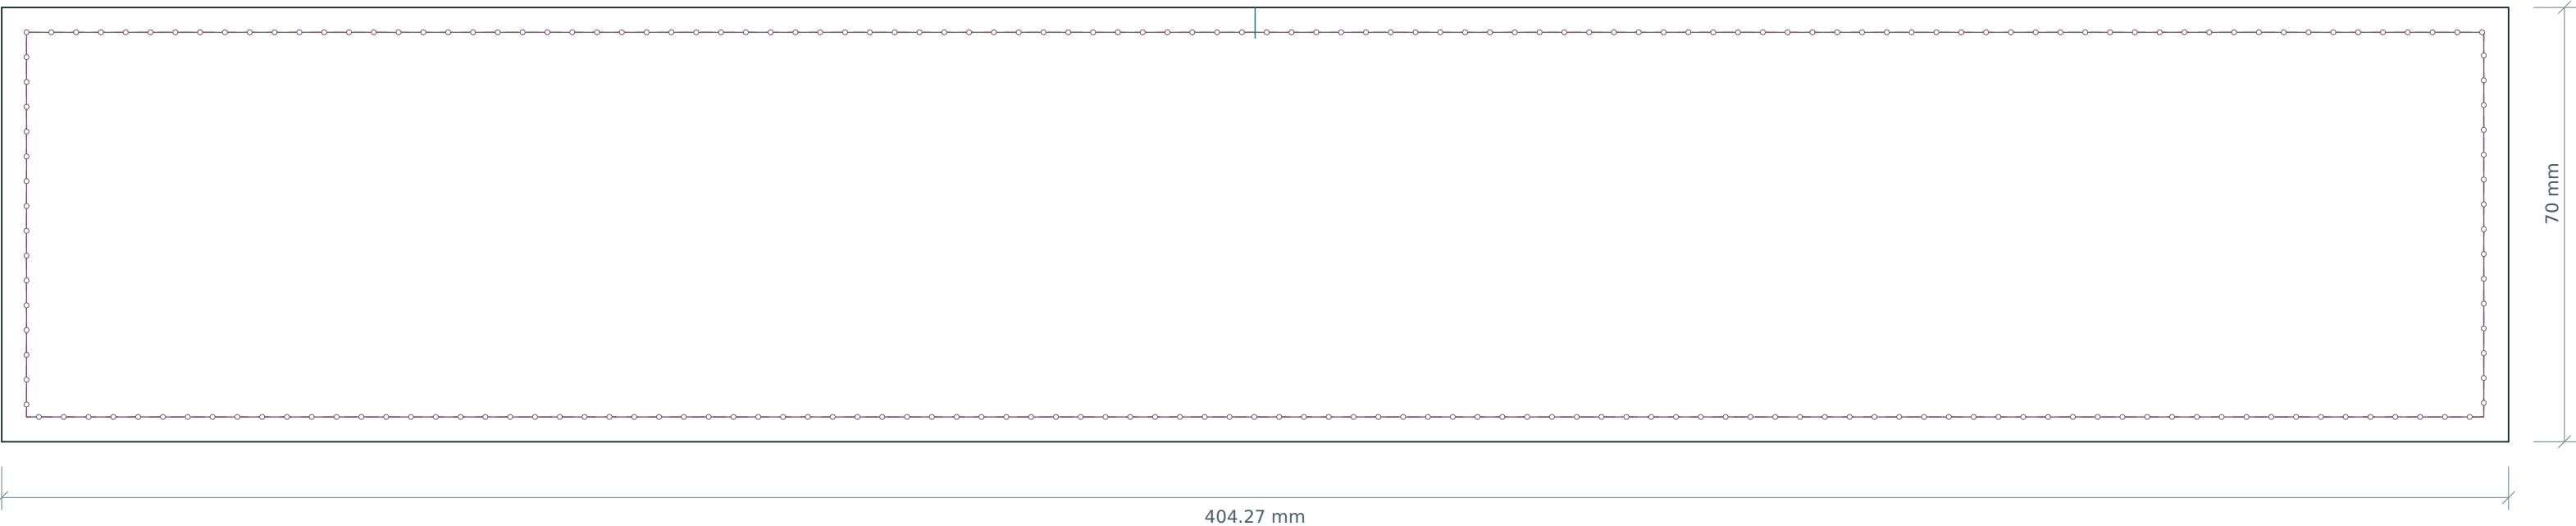

Scale check: 100 mm

Print: 100%, actual size.

Page: 458.27 × 166 mm.

Parameters and updates: vlotho-farben.com/cad/models/frame-purse/

Prototype: fold and thickness adjustments are not included.