


01 / Front wall

Edge: 241.21 × 210 mm | Seam allowance: 0 mm | 1 part.

Scale 1:1. Solid line - cut edge, dashed line - stitching line, blue dashes - marks.

Hand stitch · spacing 4 mm · holes Ø 0.8 mm

According to the diagram: body 250 × 210 mm, opening 220 mm, depth 50 mm; back panel with flap 420 mm. Strap length and fastener placement were estimated. The side panel length was recalculated along the wall contours.

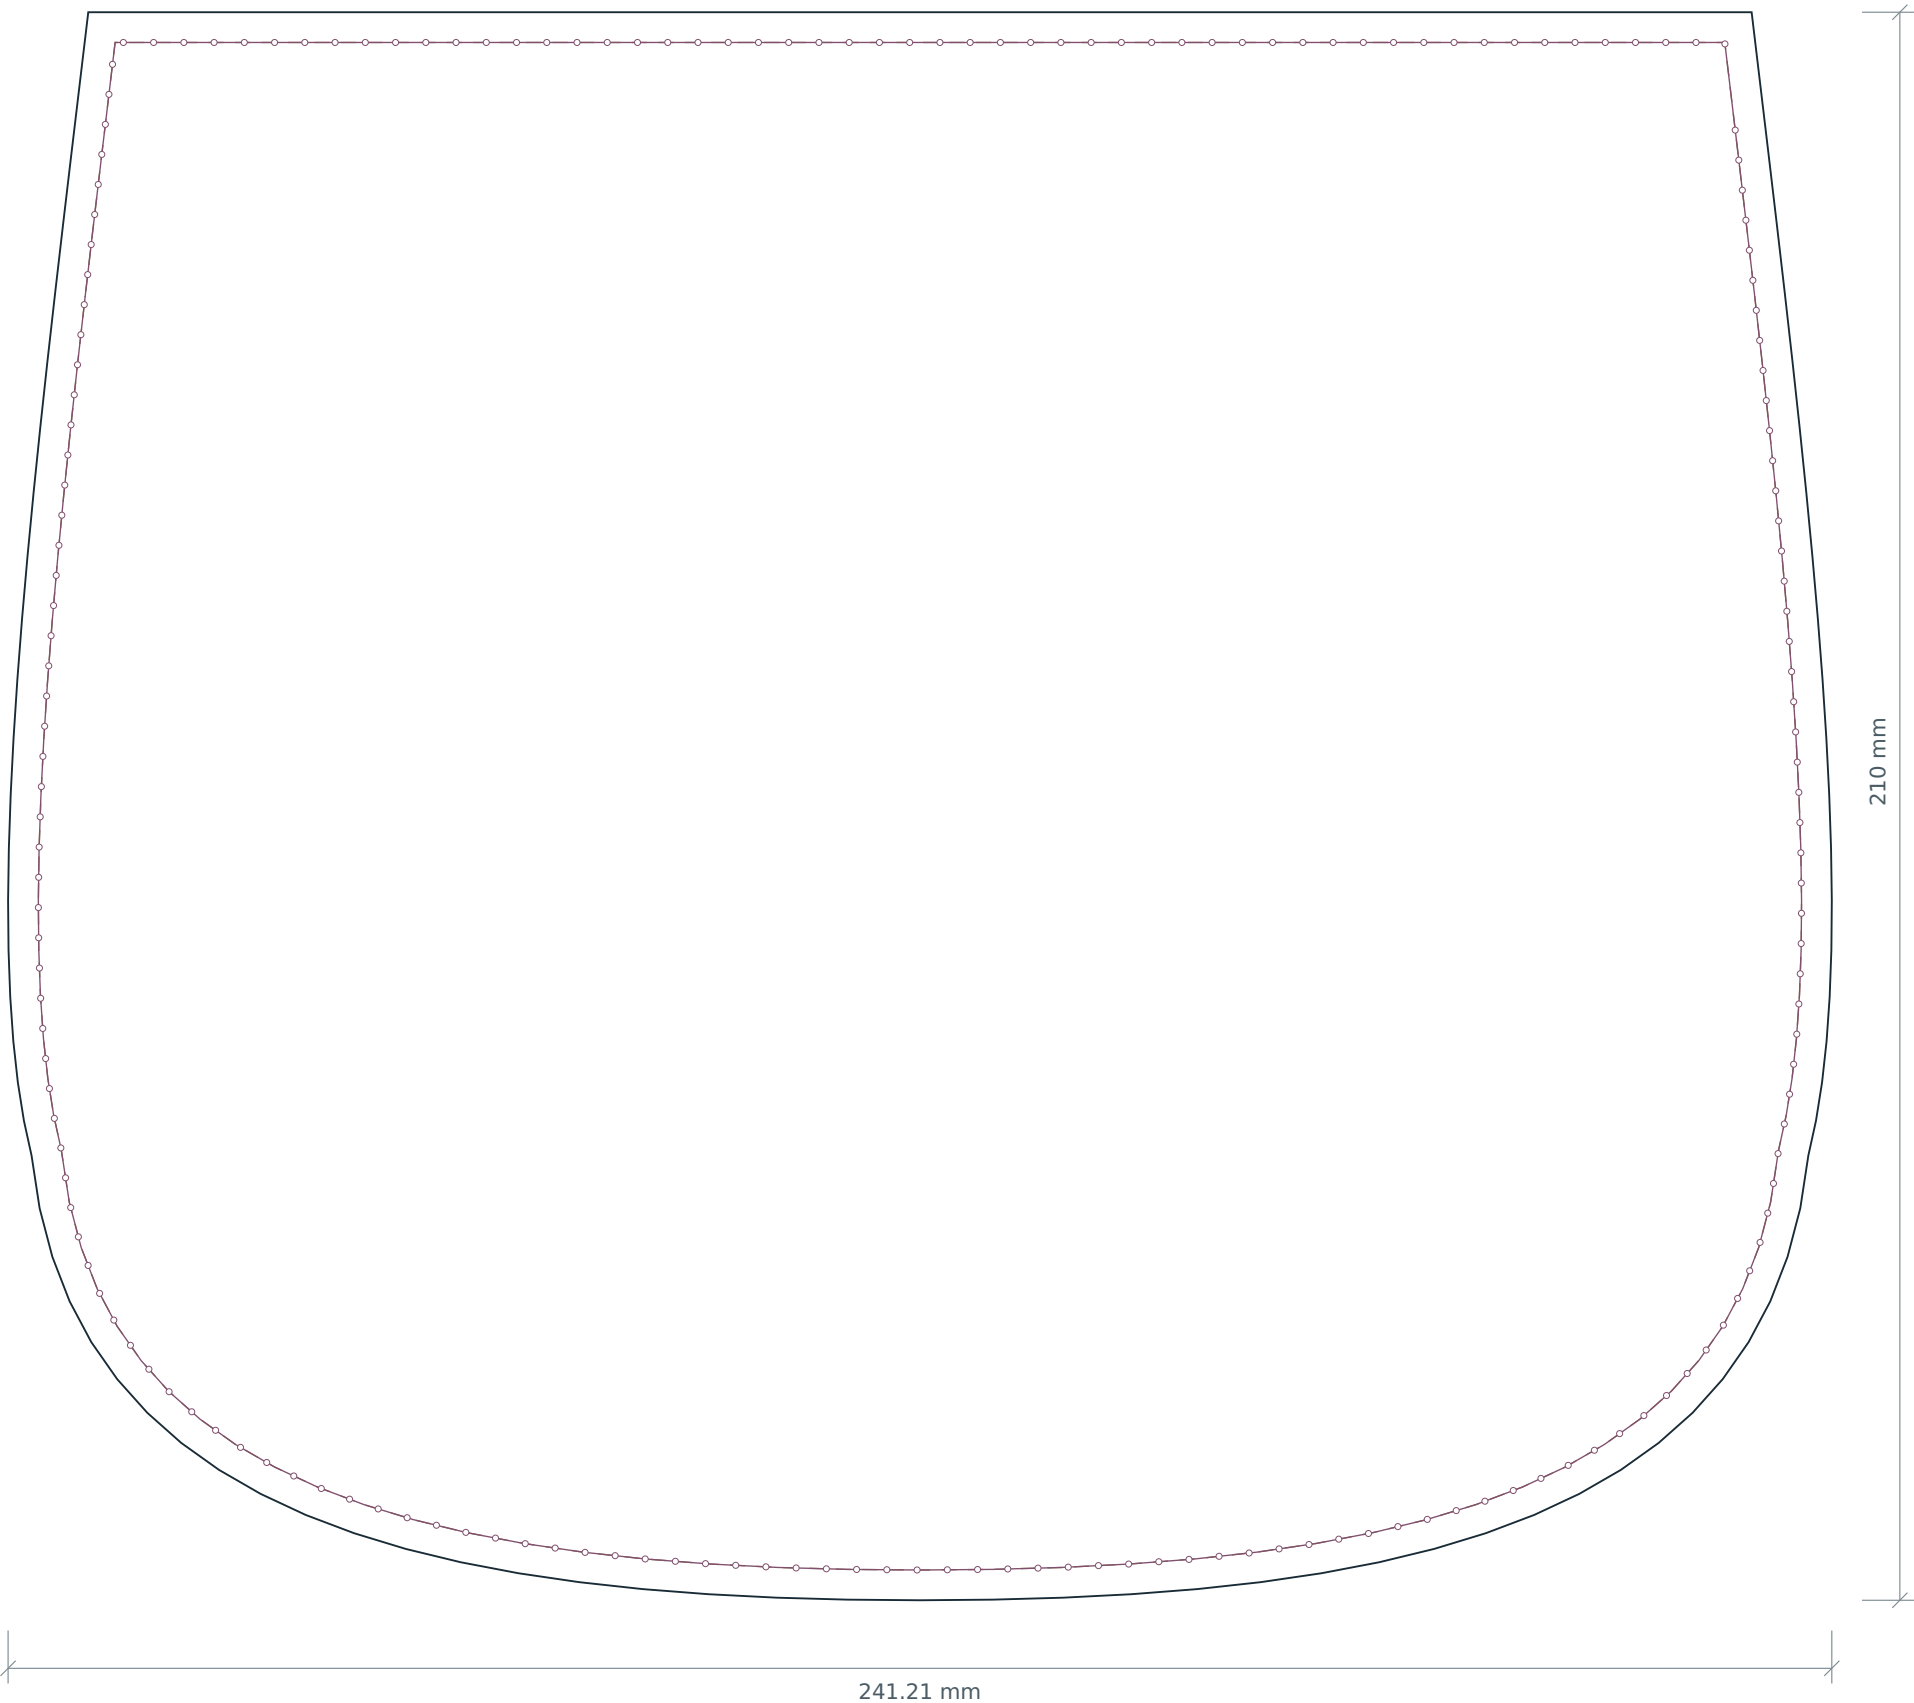

Scale check: 100 mm

Print: 100%, actual size.

Page: 295.21 × 306 mm.

Parameters and updates: vlotho-farben.com/cad/models/pear-saddle/

Prototype: fold and thickness adjustments are not included.


02 / Side panel and bottom · Continuous strip

Edge: 595.2 × 50 mm | Seam allowance: 0 mm | 1 part.

Scale 1:1. Solid line - cut edge, dashed line - stitching line, blue dashes - marks.

Hand stitch · spacing 4 mm · holes Ø 0.8 mm

The length of the base strip equals the length of the side and bottom contour of the wall. Align the middle of the bottom. Check the seam offset and thickness on the mock-up.

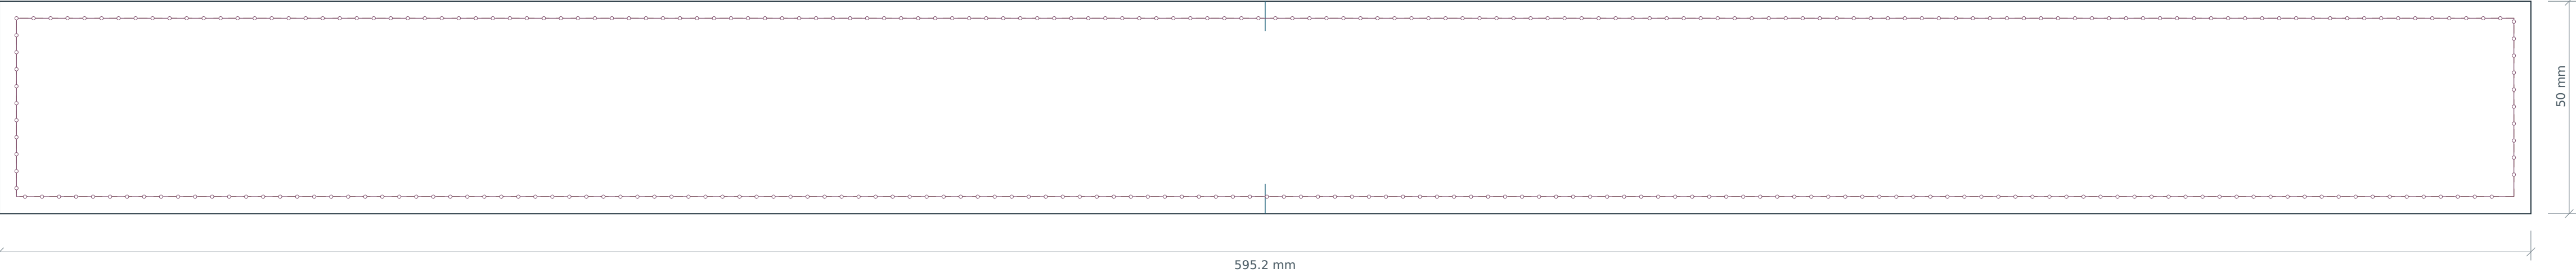

Scale check: 100 mm

Print: 100%, actual size.

Page: 649.2 × 160 mm.

Parameters and updates: vlotho-farben.com/cad/models/pear-saddle/

Prototype: fold and thickness adjustments are not included.


03 / Back and flap · One-piece layout

Edge: 241.21 × 420 mm | Seam allowance: 0 mm | 1 part.

Scale 1:1. Solid line - cut edge, dashed line - stitching line, blue dashes - marks.

Hand stitch · spacing 4 mm · holes Ø 0.8 mm

The flap is cut together with the back panel. The pair of blue lines marks the transition across the body depth. Do not sew the opening shut.

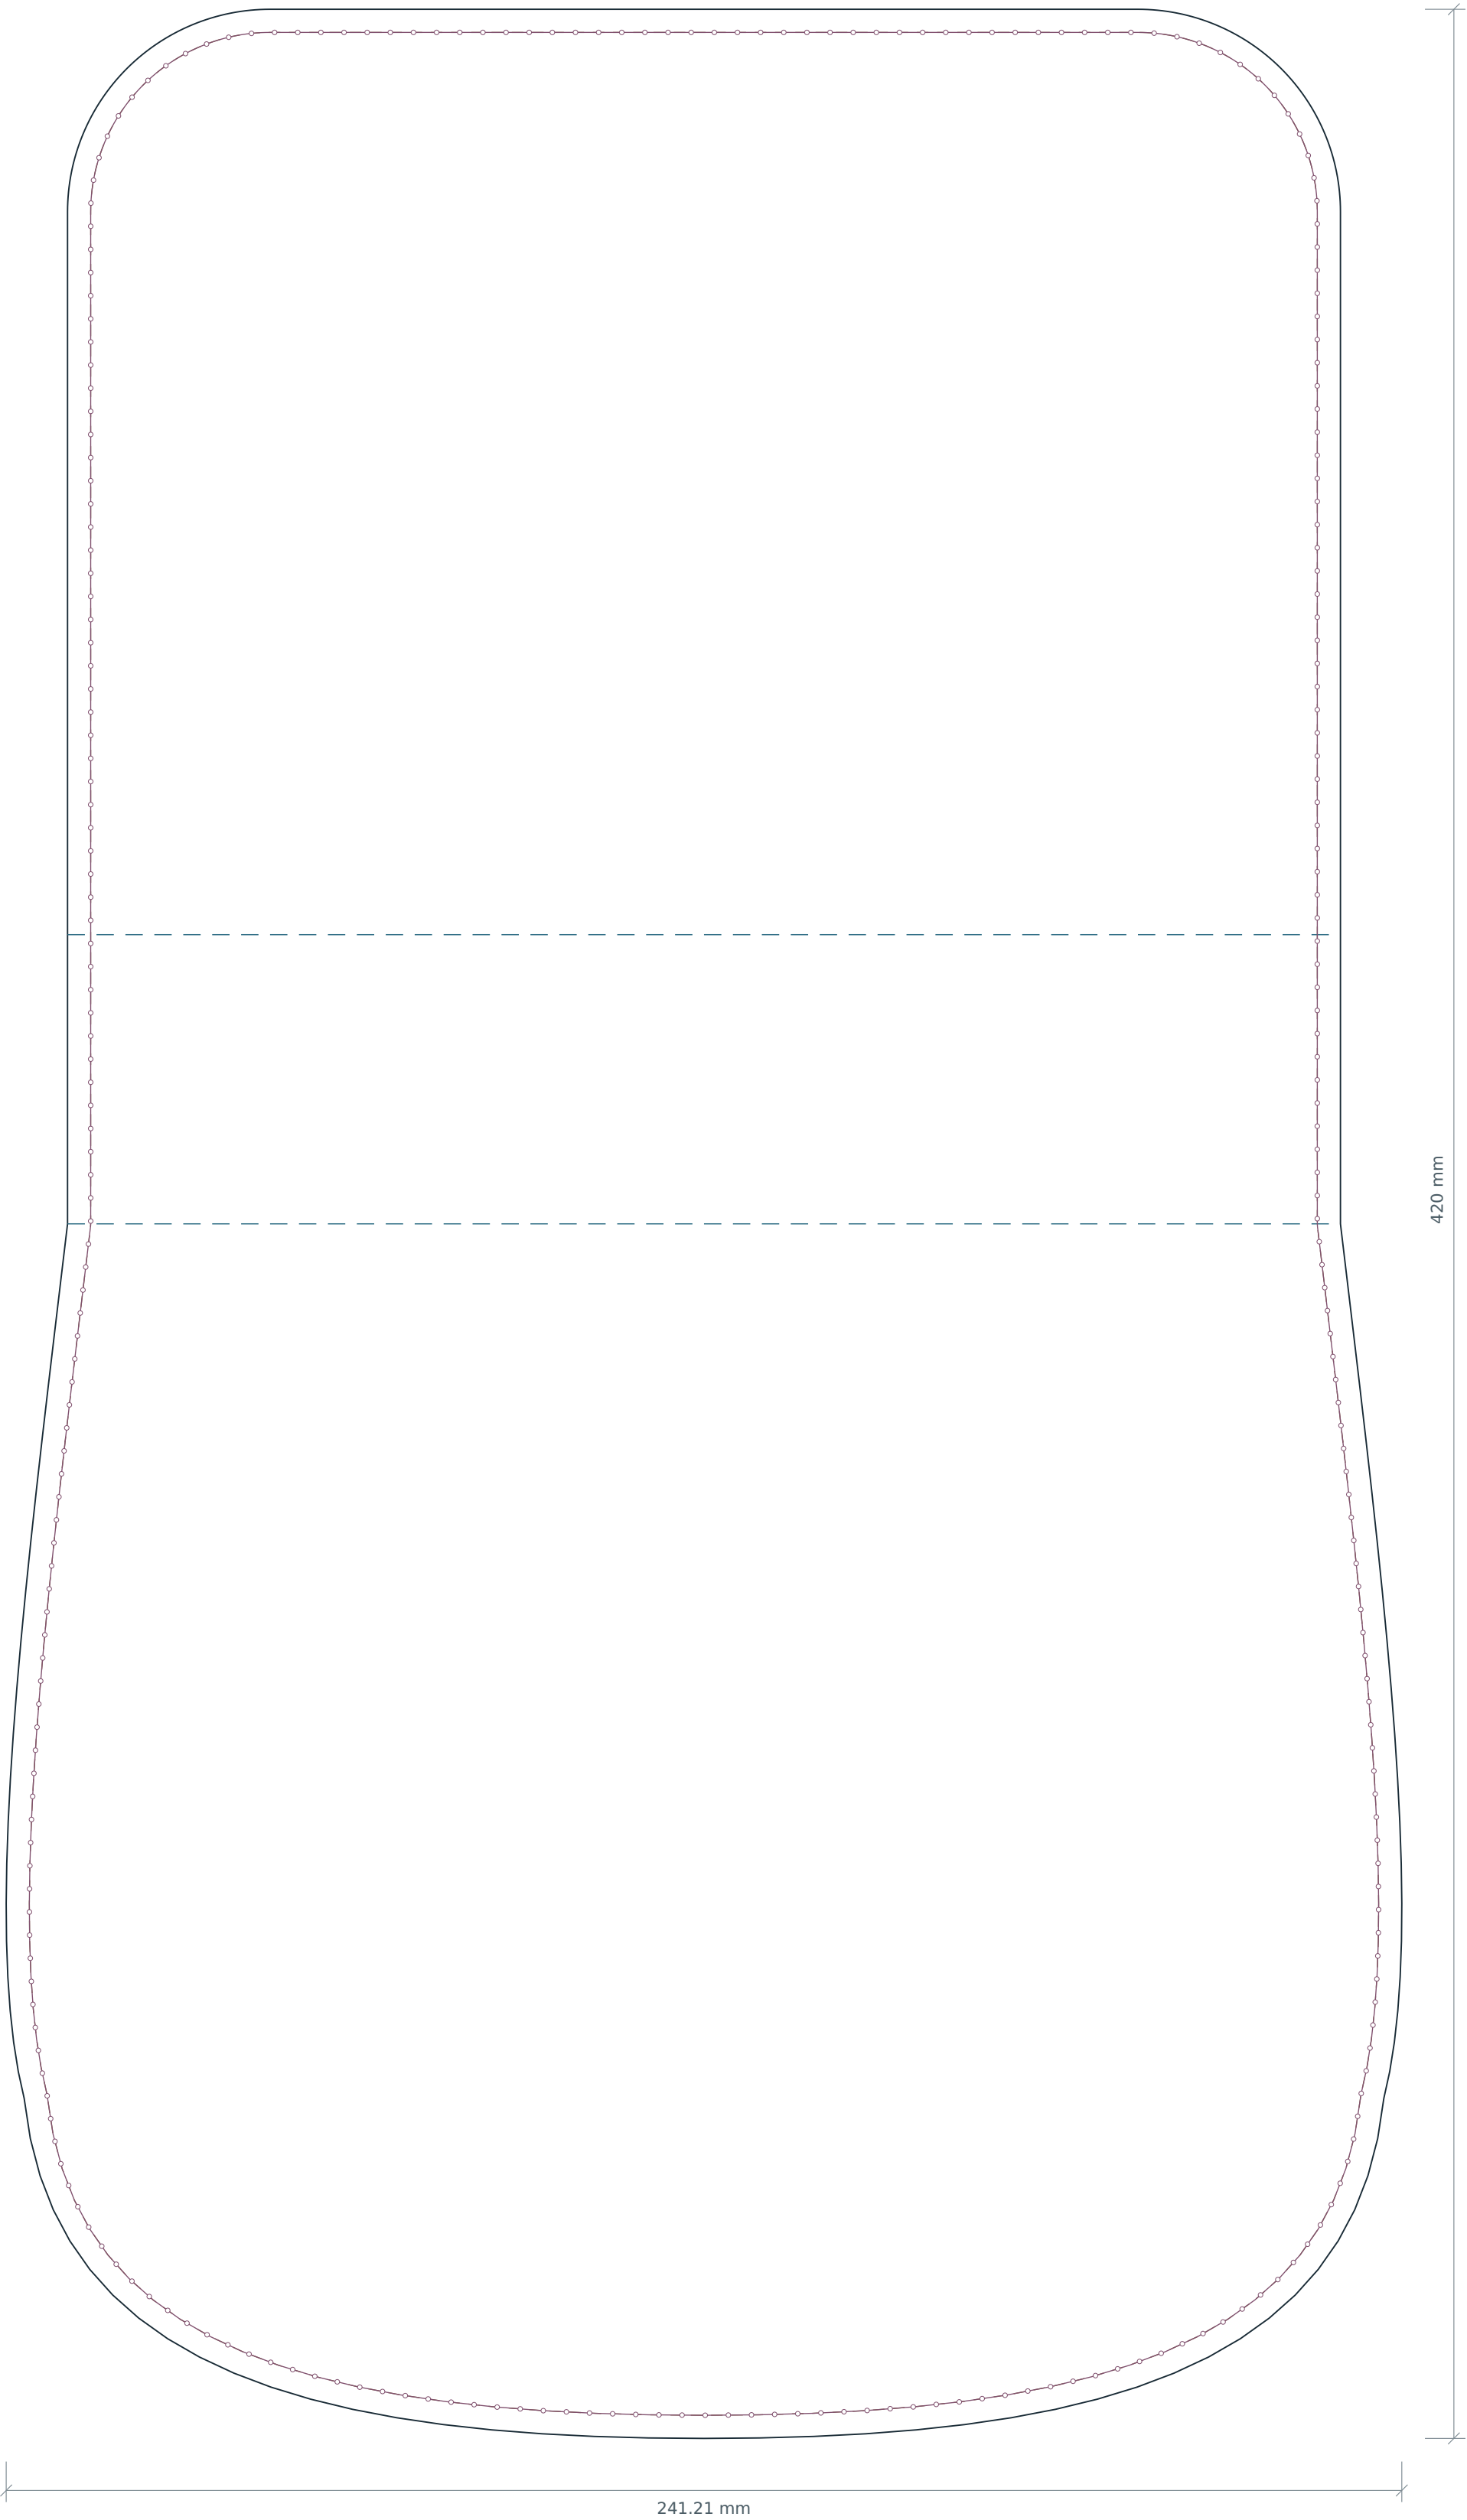

Scale check: 100 mm

Print: 100%, actual size.

Page: 295.21 × 516 mm.

Parameters and updates: vlotho-farben.com/cad/models/pear-saddle/

Prototype: fold and thickness adjustments are not included.

VLOTHO / CAD

04 / Strap attachment · left


4 / 6

Edge: 20 × 70 mm | Seam allowance: 0 mm | 1 part.

Scale 1:1. Solid line - cut edge, dashed line - stitching line, blue dashes - marks.

Hand stitch · spacing 4 mm · holes Ø 0.8 mm

According to the diagram: body 250 × 210 mm, opening 220 mm, depth 50 mm; back panel with flap 420 mm. Strap length and fastener placement were estimated. The side panel length was recalculated along the wall contours.

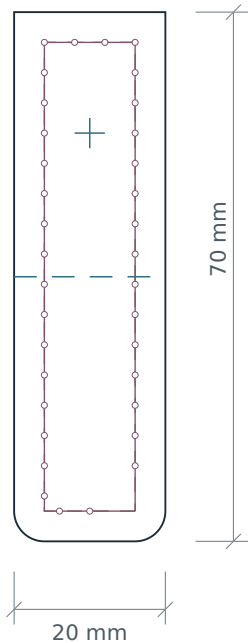

Scale check: 100 mm



Parameters and updates: vlotho-farben.com/cad/models/pear-saddle/

Prototype: fold and thickness adjustments are not included.

Print: 100%, actual size.

Page: 240 × 166 mm.

05 / Strap attachment · right


5 / 6

Edge: 20 × 70 mm | Seam allowance: 0 mm | 1 part.

Scale 1:1. Solid line - cut edge, dashed line - stitching line, blue dashes - marks.

Hand stitch · spacing 4 mm · holes Ø 0.8 mm

According to the diagram: body 250 × 210 mm, opening 220 mm, depth 50 mm; back panel with flap 420 mm. Strap length and fastener placement were estimated. The side panel length was recalculated along the wall contours.

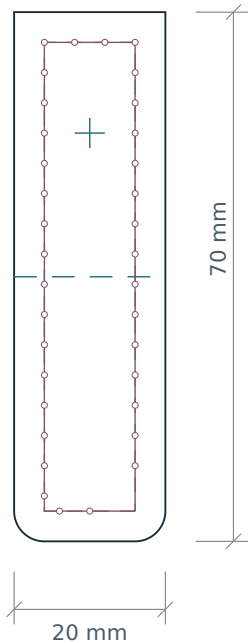

Scale check: 100 mm



Parameters and updates: vlotho-farben.com/cad/models/pear-saddle/

Prototype: fold and thickness adjustments are not included.

Print: 100%, actual size.

Page: 240 × 166 mm.


06 / Shoulder strap

Edge: 1100 × 20 mm | Seam allowance: 0 mm | 1 part.

Scale 1:1. Solid line - cut edge, dashed line - stitching line, blue dashes - marks.

Hand stitch · spacing 4 mm · holes Ø 0.8 mm

The trial length includes ends for adjustment. Holes Ø 3 mm; check against the buckle. Carabiners and rings are purchased hardware.

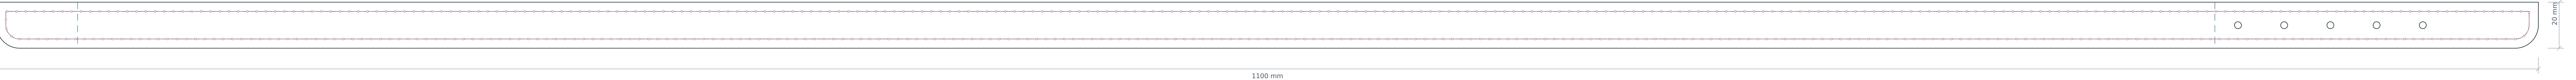

Scale check: 100 mm

Parameters and updates: vlotho-farben.com/cad/models/pear-saddle/

Prototype: fold and thickness adjustments are not included.

Print: 100%, actual size.

Page: 1154 × 160 mm.