


01 / Asymmetrical back

Edge: 180 × 320 mm | Seam allowance: 0 mm | 1 part.

Scale 1:1. Solid line - cut edge, dashed line - stitching line, blue dashes - marks.

Hand stitch · spacing 4 mm · holes Ø 0.8 mm

No readable scale: trial dimensions of 180 × 320 × 40 mm were adopted. Asymmetric base, zippered compartment, and separate gusseted pocket with flap. The strap in the photo is textile: its length is for reference only; check a leather replacement first.

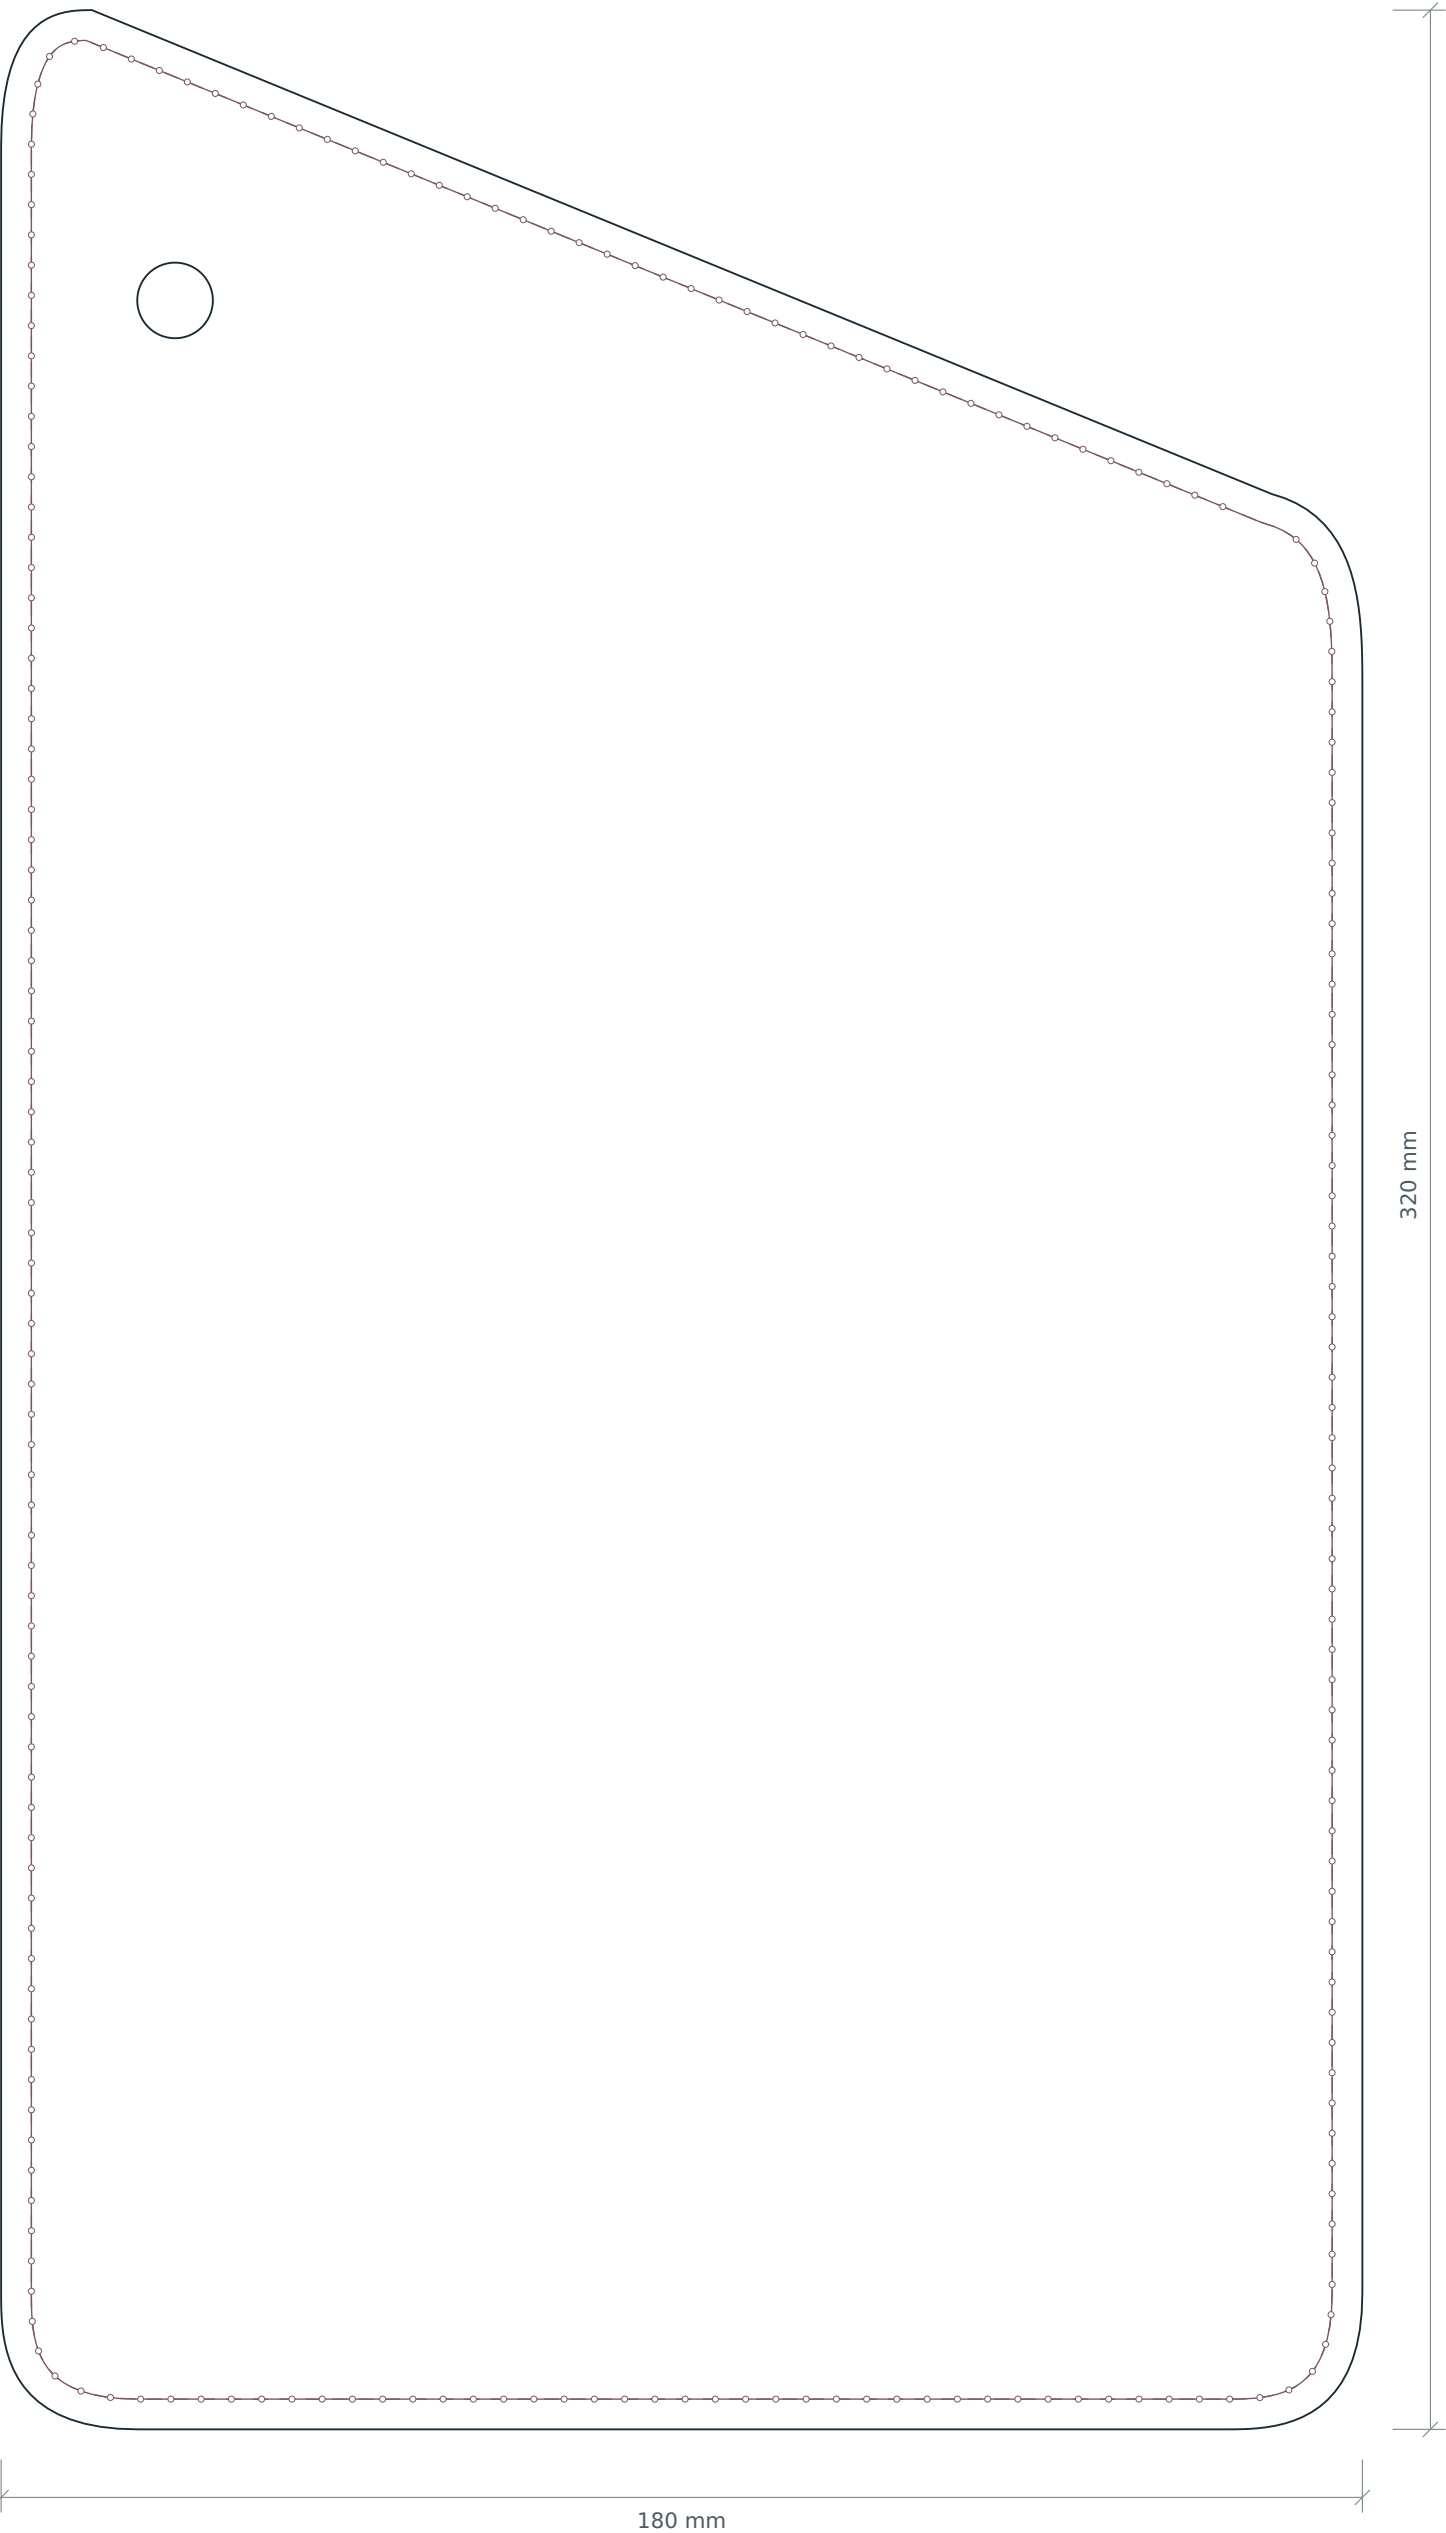

Scale check: 100 mm

Print: 100%, actual size.

Page: 240 × 416 mm.

Parameters and updates: [vlotho-farben.com/cad/models/pocket-sling/](https://vlotho-farben.com/cad/models/pocket-sling/)

Prototype: fold and thickness adjustments are not included.


02 / Asymmetrical front base

Edge: 180 × 320 mm | Seam allowance: 0 mm | 1 part.

Scale 1:1. Solid line - cut edge, dashed line - stitching line, blue dashes - marks.

Hand stitch · spacing 4 mm · holes Ø 0.8 mm

No readable scale: trial dimensions of 180 × 320 × 40 mm were adopted. Asymmetric base, zippered compartment, and separate gusseted pocket with flap. The strap in the photo is textile: its length is for reference only; check a leather replacement first.

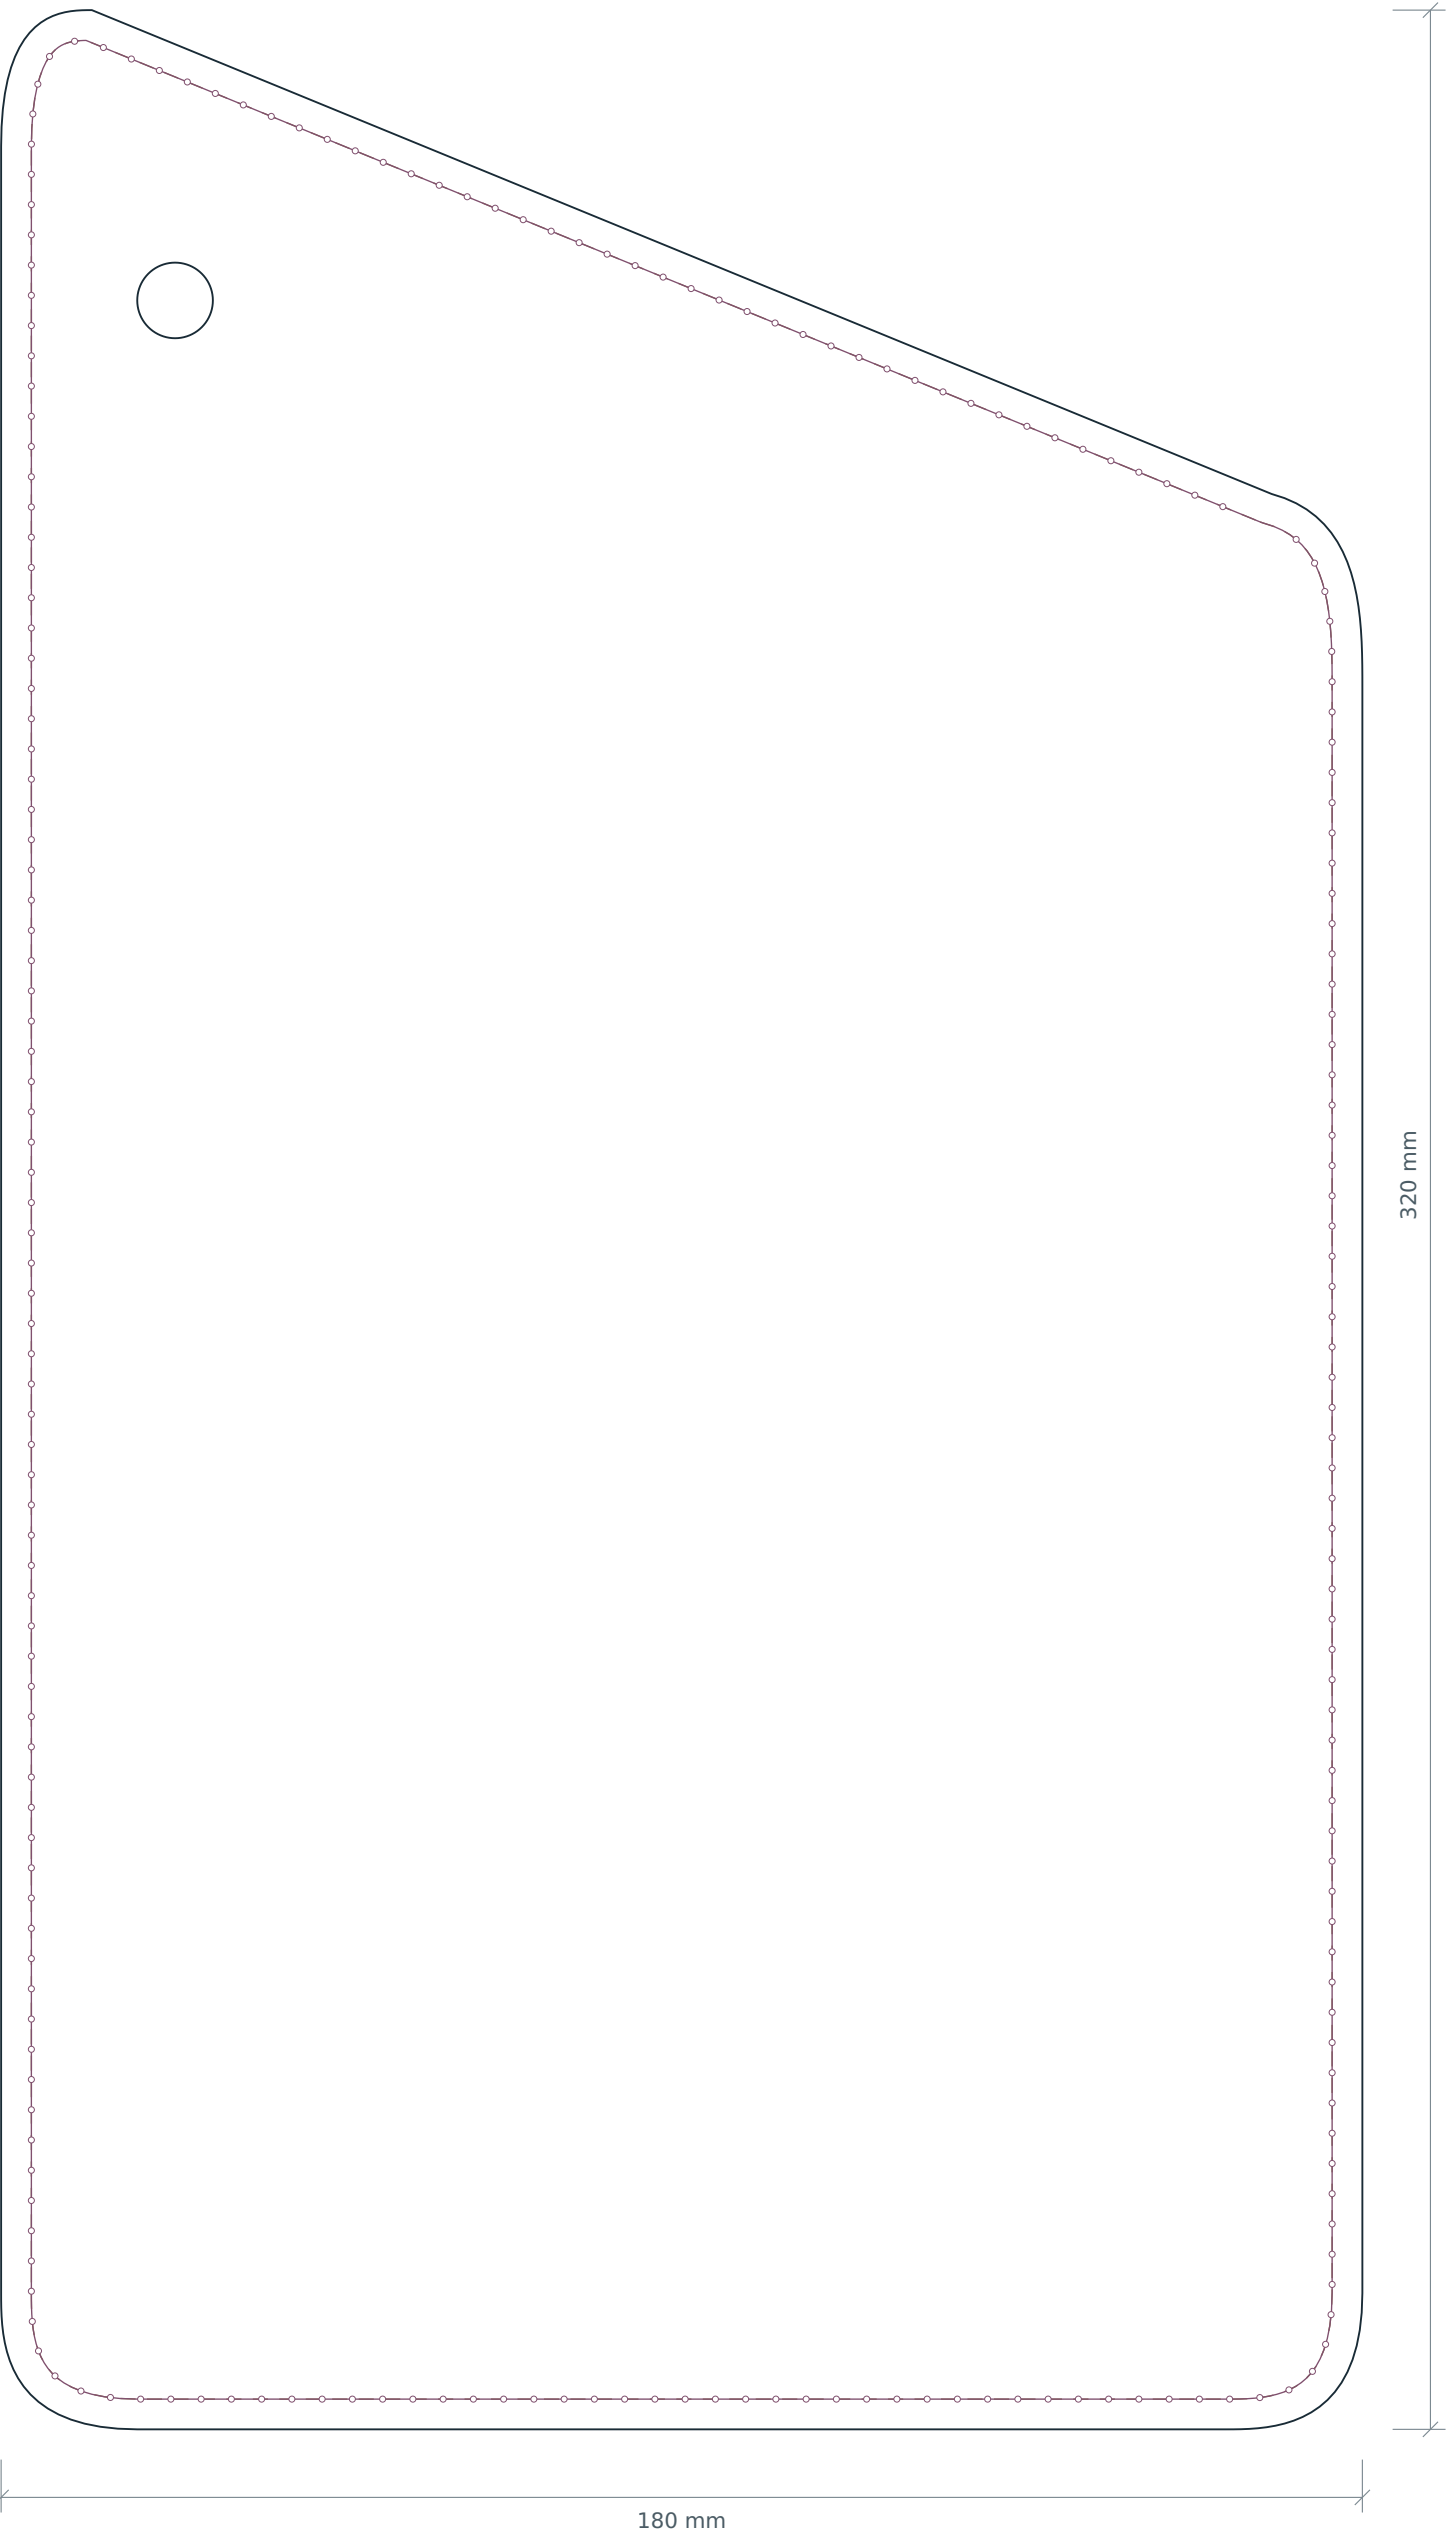

Scale check: 100 mm

Print: 100%, actual size.

Page: 240 × 416 mm.


03 / Side base strip

Edge: 923.84 × 12 mm | Seam allowance: 0 mm | 1 part.

Scale 1:1. Solid line - cut edge, dashed line - stitching line, blue dashes - marks.

Hand stitch · spacing 4 mm · holes Ø 0.8 mm

The base strip length has been recalculated along the wall contour. Align the center marks; check the seam offset and fit on the prototype.

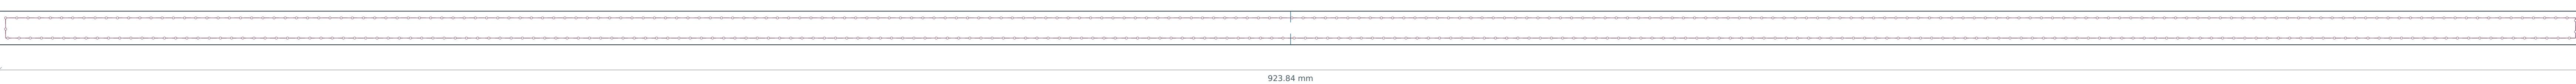

Scale check: 100 mm

Parameters and updates: [vlotho-farben.com/cad/models/pocket-sling/](https://vlotho-farben.com/cad/models/pocket-sling/)

Prototype: fold and thickness adjustments are not included.

Print: 100%, actual size.

Page: 977.84 × 160 mm.


# 04 / Zipped front compartment

Edge: 156.6 × 227.2 mm | Seam allowance: 0 mm | 1 part.

Scale 1:1. Solid line - cut edge, dashed line - stitching line, blue dashes - marks.

Hand stitch · spacing 4 mm · holes Ø 0.8 mm

No readable scale: trial dimensions of 180 × 320 × 40 mm were adopted. Asymmetric base, zippered compartment, and separate gusseted pocket with flap. The strap in the photo is textile: its length is for reference only; check a leather replacement first.

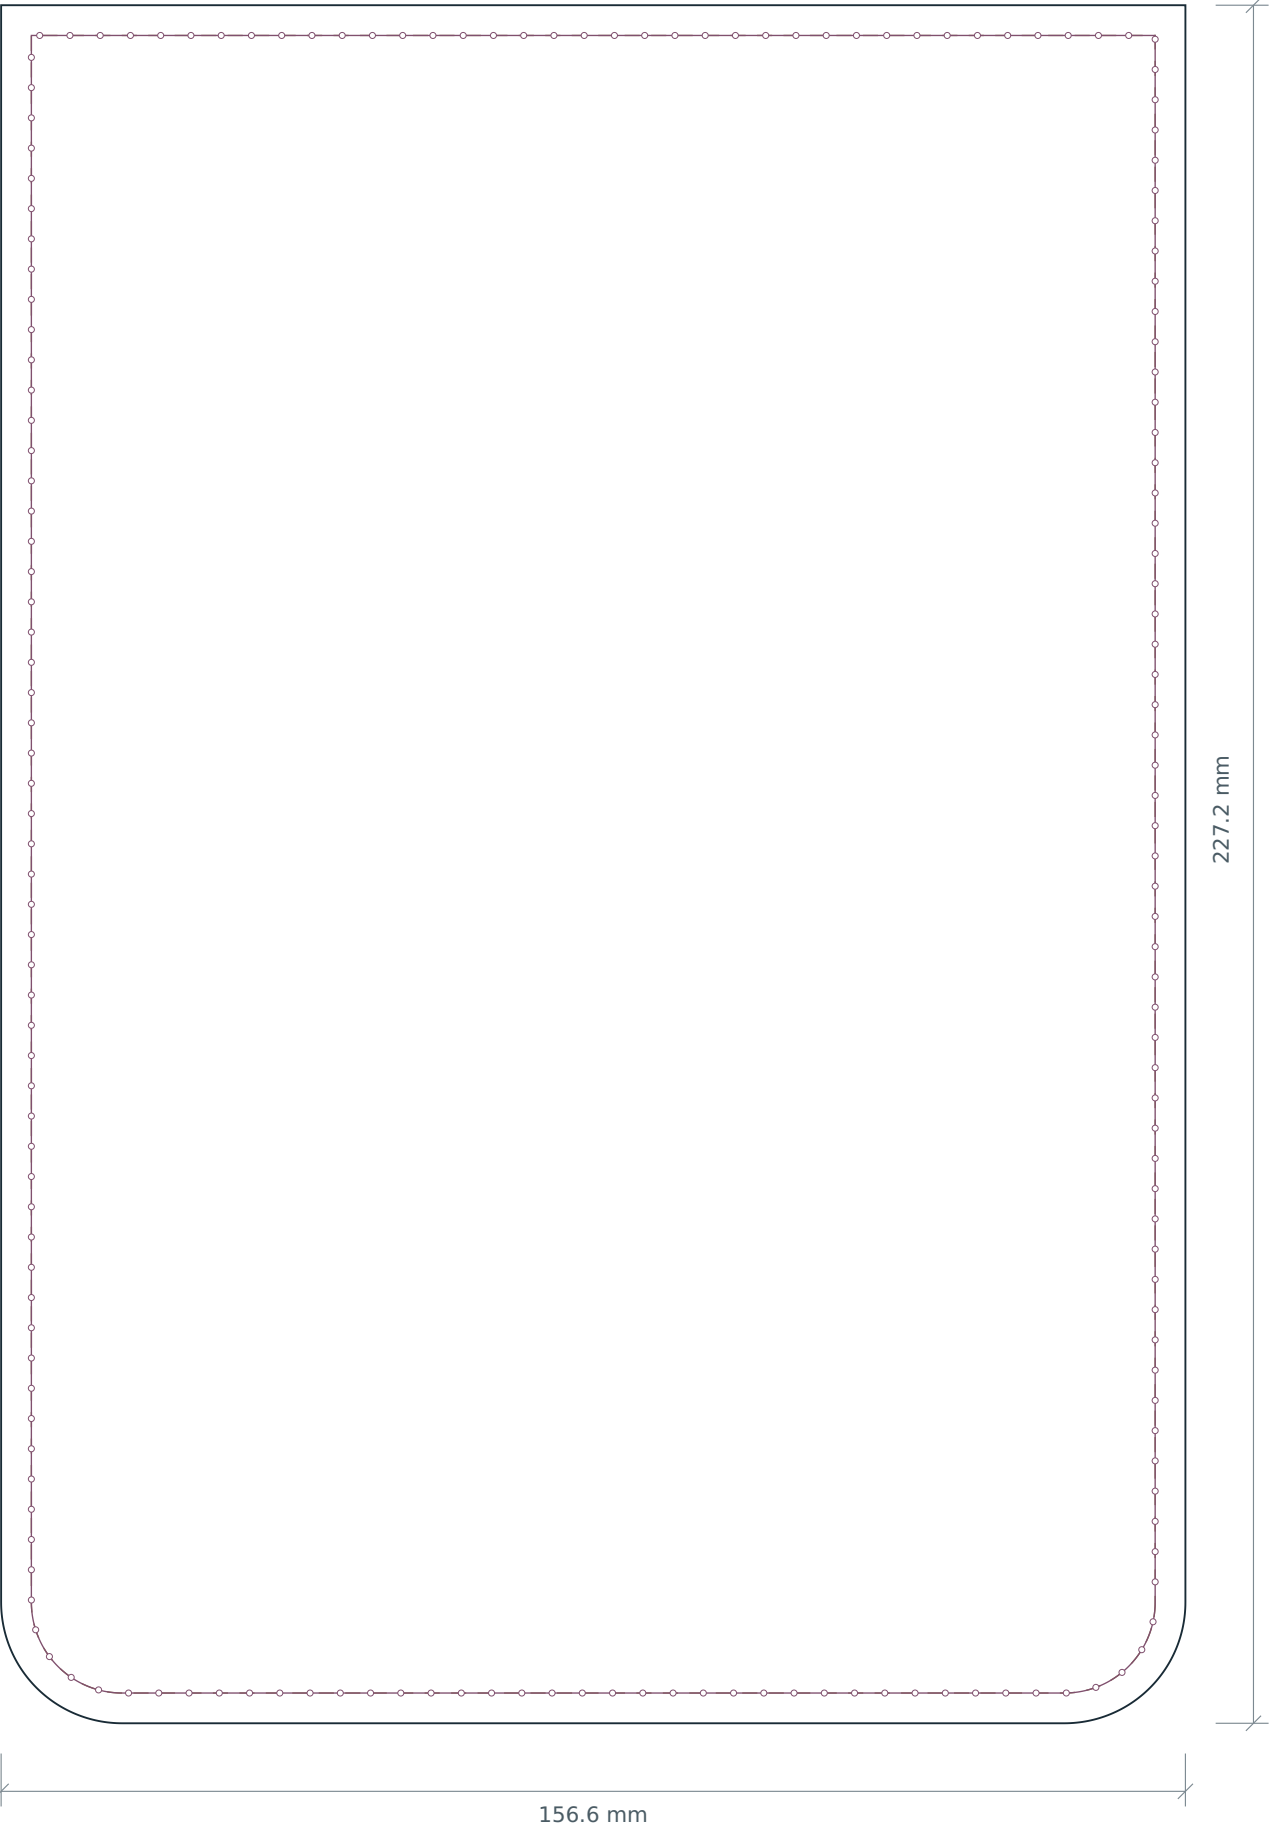

Scale check: 100 mm

Print: 100%, actual size.

Page: 240 × 323.2 mm.

Parameters and updates: [vlotho-farben.com/cad/models/pocket-sling/](https://vlotho-farben.com/cad/models/pocket-sling/)

Prototype: fold and thickness adjustments are not included.


05 / Compartment side panel with a slit for the zipper

Edge: 753.86 × 28 mm | Seam allowance: 0 mm | 1 part.

Scale 1:1. Solid line - cut edge, dashed line - stitching line, blue dashes - marks.

Hand stitch · spacing 4 mm · holes Ø 0.8 mm

Zipper slot width 6 mm. The section without a slot joins the compartment halves at the bottom. Check the slot length and width against the hardware.

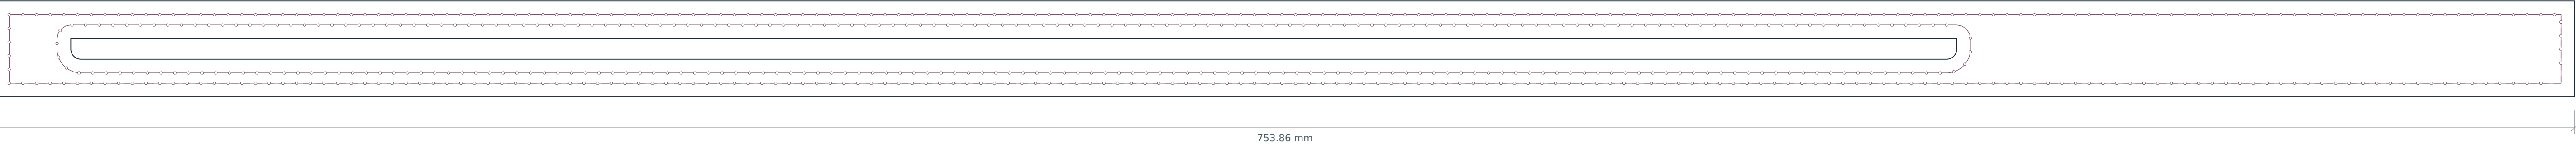

Scale check: 100 mm

Parameters and updates: [vlotho-farben.com/cad/models/pocket-sling/](https://vlotho-farben.com/cad/models/pocket-sling/)  
Prototype: fold and thickness adjustments are not included.

Print: 100%, actual size.

Page: 807.86 × 160 mm.


# 06 / Pocket · outer-pocket

Edge: 117.45 × 140.86 mm | Seam allowance: 0 mm | 1 part.

Scale 1:1. Solid line - cut edge, dashed line - stitching line, blue dashes - marks.

Hand stitch · spacing 4 mm · holes Ø 0.8 mm

No readable scale: trial dimensions of 180 × 320 × 40 mm were adopted. Asymmetric base, zippered compartment, and separate gusseted pocket with flap. The strap in the photo is textile: its length is for reference only; check a leather replacement first.

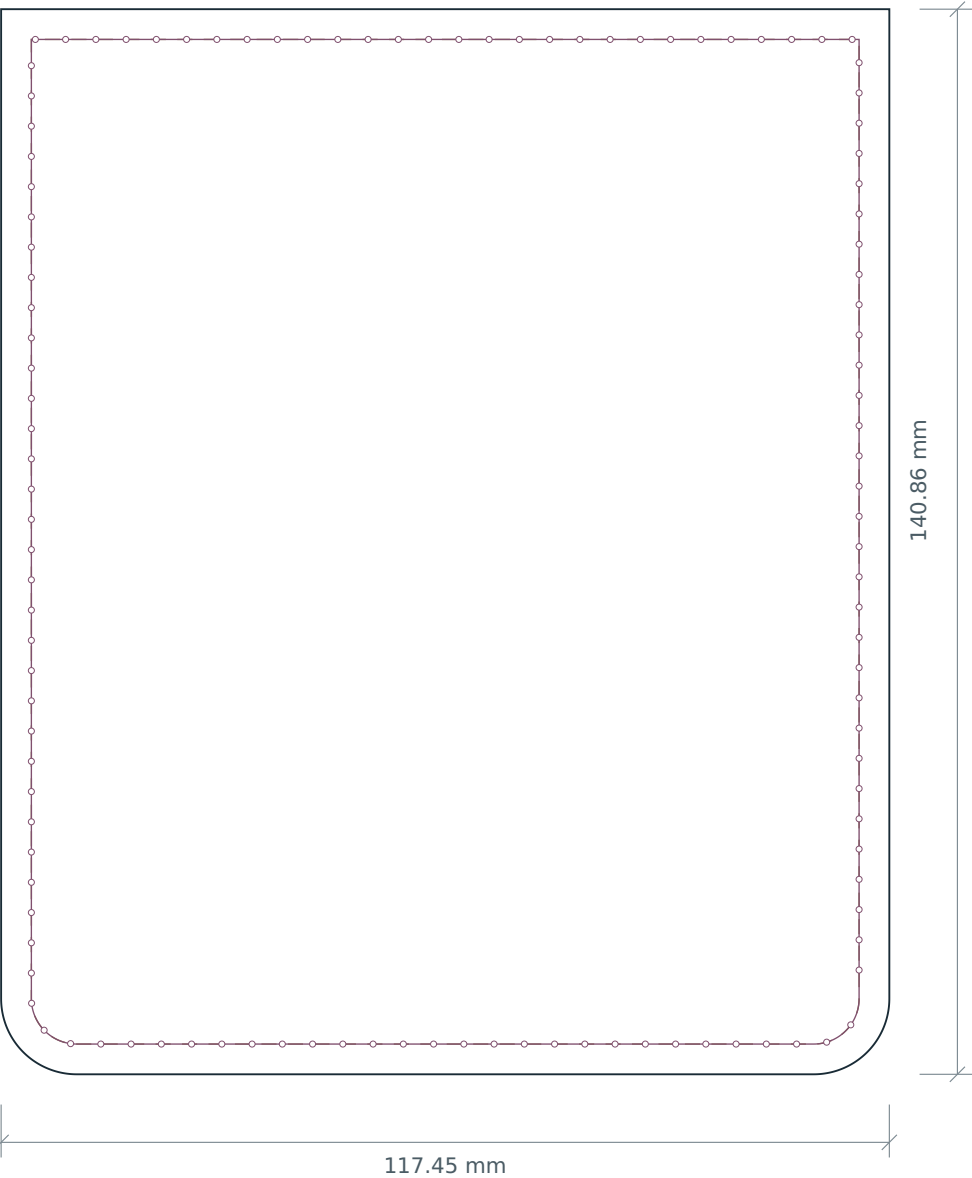

Scale check: 100 mm

Print: 100%, actual size.

Page: 240 × 236.86 mm.

Parameters and updates: [vlotho-farben.com/cad/models/pocket-sling/](https://vlotho-farben.com/cad/models/pocket-sling/)

Prototype: fold and thickness adjustments are not included.


# 07 / Pocket side panel and bottom · outer-pocket

Edge: 390.59 × 18 mm | Seam allowance: 0 mm | 1 part.

Scale 1:1. Solid line - cut edge, dashed line - stitching line, blue dashes - marks.

Hand stitch · spacing 4 mm · holes Ø 0.8 mm

The base strip length has been recalculated along the wall contour. Align the center marks; check the seam offset and fit on the prototype.

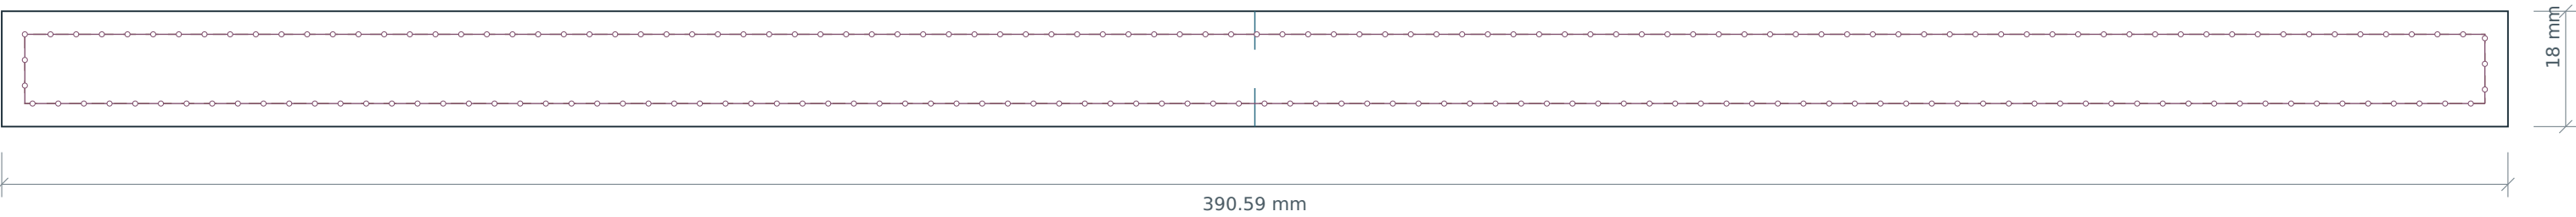

Scale check: 100 mm



Parameters and updates: [vlotho-farben.com/cad/models/pocket-sling/](https://vlotho-farben.com/cad/models/pocket-sling/)

Prototype: fold and thickness adjustments are not included.

Print: 100%, actual size.

Page: 444.59 × 160 mm.

## 08 / Pocket flap · outer-pocket


8 / 12

Edge: 117.45 × 93 mm | Seam allowance: 0 mm | 1 part.

Scale 1:1. Solid line - cut edge, dashed line - stitching line, blue dashes - marks.

Hand stitch · spacing 4 mm · holes Ø 0.8 mm

No readable scale: trial dimensions of 180 × 320 × 40 mm were adopted. Asymmetric base, zippered compartment, and separate gusseted pocket with flap. The strap in the photo is textile: its length is for reference only; check a leather replacement first.

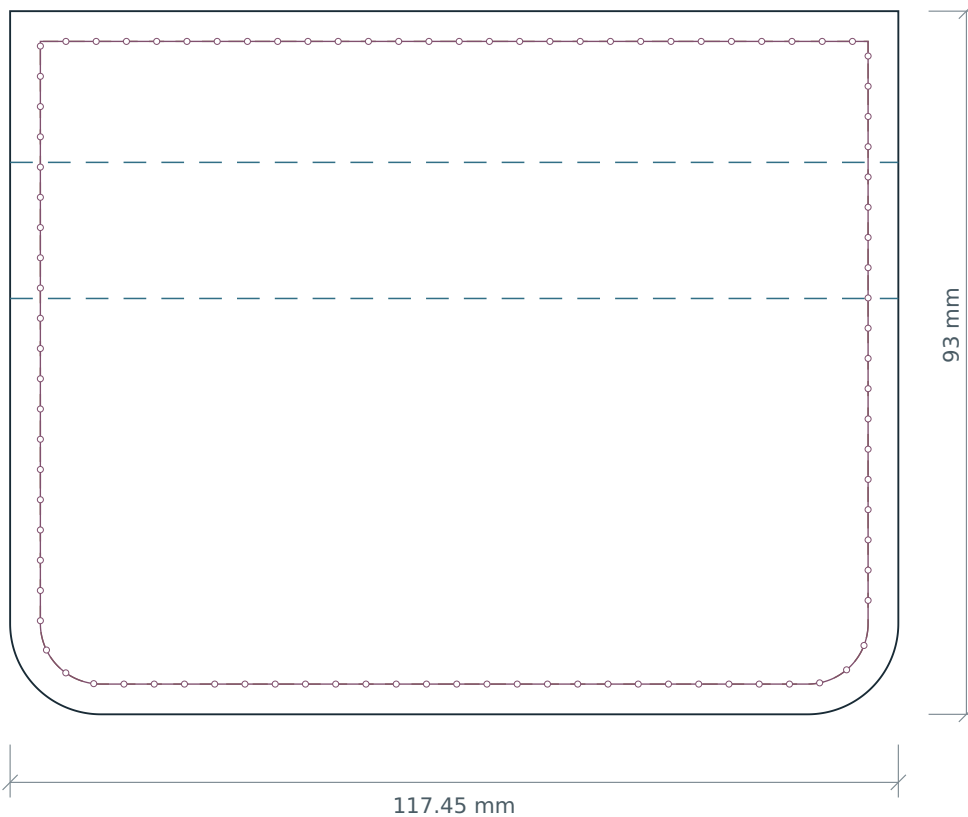

Scale check: 100 mm

Print: 100%, actual size.

Page: 240 × 189 mm.

Parameters and updates: [vlotho-farben.com/cad/models/pocket-sling/](https://vlotho-farben.com/cad/models/pocket-sling/)

Prototype: fold and thickness adjustments are not included.

VLOTHO / CAD


# 09 / Inner flat pocket

Edge: 125.28 × 147.68 mm | Seam allowance: 0 mm | 1 part.

Scale 1:1. Solid line - cut edge, dashed line - stitching line, blue dashes - marks.

Hand stitch · spacing 4 mm · holes Ø 0.8 mm

No readable scale: trial dimensions of 180 × 320 × 40 mm were adopted. Asymmetric base, zippered compartment, and separate gusseted pocket with flap. The strap in the photo is textile: its length is for reference only; check a leather replacement first.

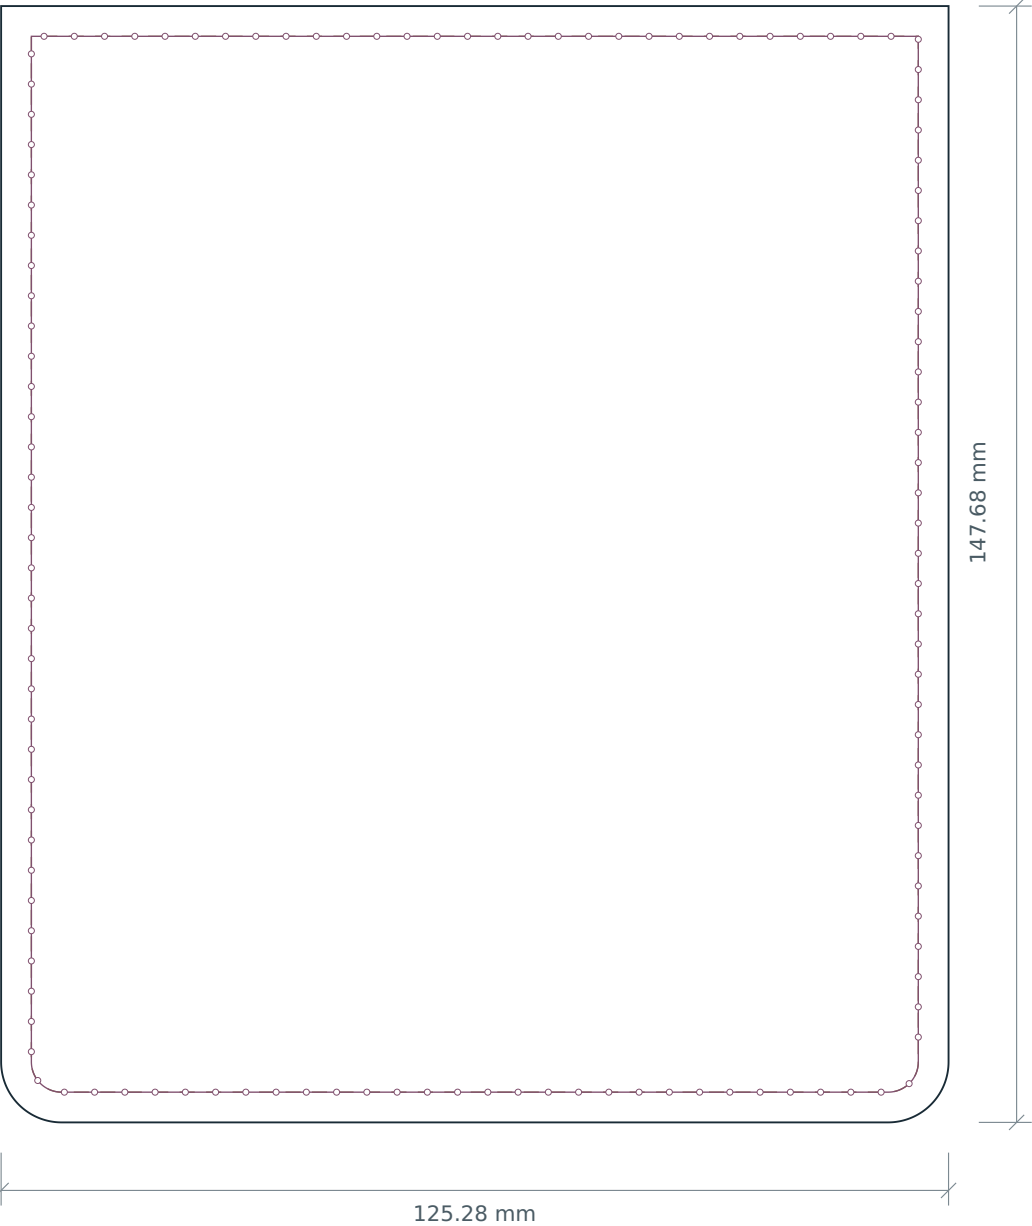

Scale check: 100 mm

Print: 100%, actual size.

Page: 240 × 243.68 mm.

Parameters and updates: [vlotho-farben.com/cad/models/pocket-sling/](https://vlotho-farben.com/cad/models/pocket-sling/)

Prototype: fold and thickness adjustments are not included.


10 / Shoulder strap · Leather strap replacement

Edge: 1200 × 30 mm | Seam allowance: 0 mm | 1 part.

Scale 1:1. Solid line - cut edge, dashed line - stitching line, blue dashes - marks.

Hand stitch · spacing 4 mm · holes Ø 0.8 mm

The photograph shows textile webbing. This is the leather replacement pattern; adjust the length to the wearer, with the adjustment method determined by the buckle.

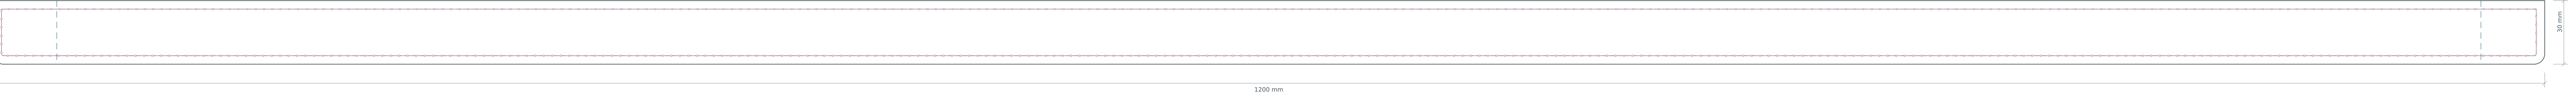

## 11 / Strap attachment · Upper


11 / 12

Edge: 30 × 65 mm | Seam allowance: 0 mm | 1 part.

Scale 1:1. Solid line - cut edge, dashed line - stitching line, blue dashes - marks.

Hand stitch · spacing 4 mm · holes Ø 0.8 mm

No readable scale: trial dimensions of 180 × 320 × 40 mm were adopted. Asymmetric base, zippered compartment, and separate gusseted pocket with flap. The strap in the photo is textile: its length is for reference only; check a leather replacement first.

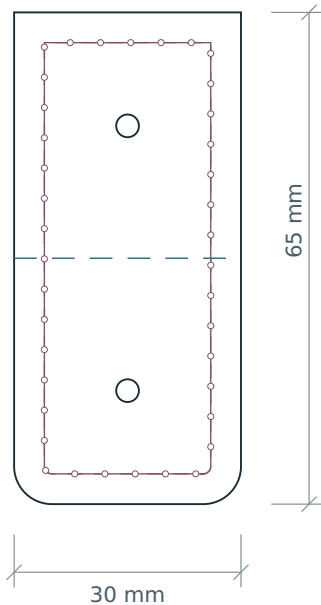

Scale check: 100 mm

Print: 100%, actual size.

Page: 240 × 161 mm.

Parameters and updates: [vlotho-farben.com/cad/models/pocket-sling/](https://vlotho-farben.com/cad/models/pocket-sling/)

Prototype: fold and thickness adjustments are not included.

VLOTHO / CAD

## 12 / Strap attachment · Lower


12 / 12

Edge: 30 × 65 mm | Seam allowance: 0 mm | 1 part.

Scale 1:1. Solid line - cut edge, dashed line - stitching line, blue dashes - marks.

Hand stitch · spacing 4 mm · holes Ø 0.8 mm

No readable scale: trial dimensions of 180 × 320 × 40 mm were adopted. Asymmetric base, zippered compartment, and separate gusseted pocket with flap. The strap in the photo is textile: its length is for reference only; check a leather replacement first.

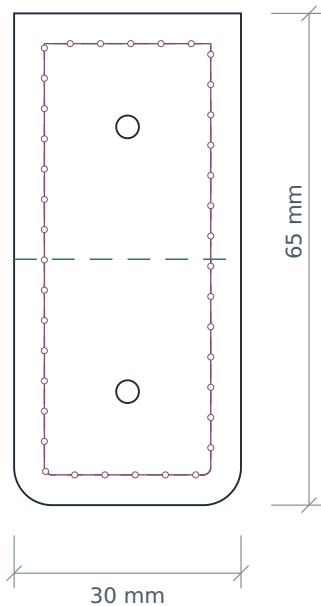

Scale check: 100 mm



Parameters and updates: [vlotho-farben.com/cad/models/pocket-sling/](https://vlotho-farben.com/cad/models/pocket-sling/)

Prototype: fold and thickness adjustments are not included.

Print: 100%, actual size.

Page: 240 × 161 mm.